

CNC

L I G H T I N G


BY
RKLITE
SINCE 1961


EXTERIOR CATALOG



**PROUDLY
MADE IN
BHARAT**


2024-25

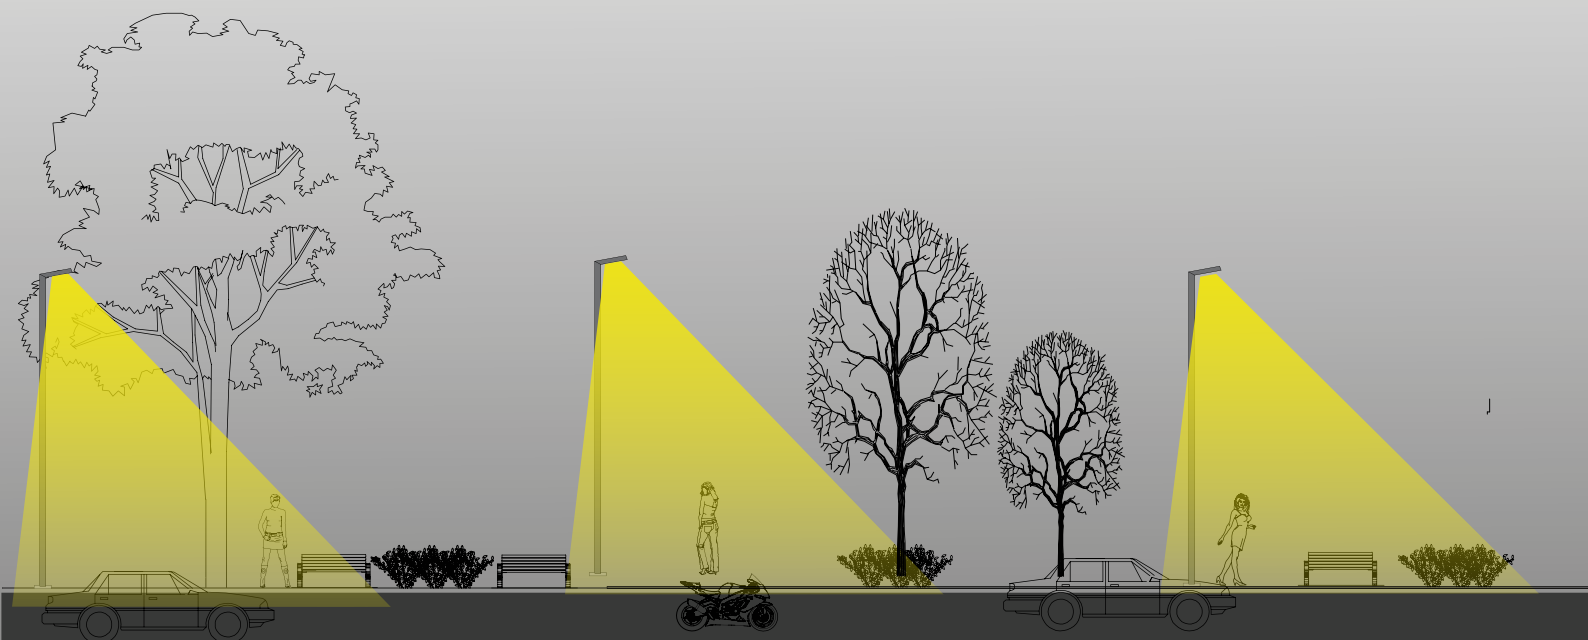

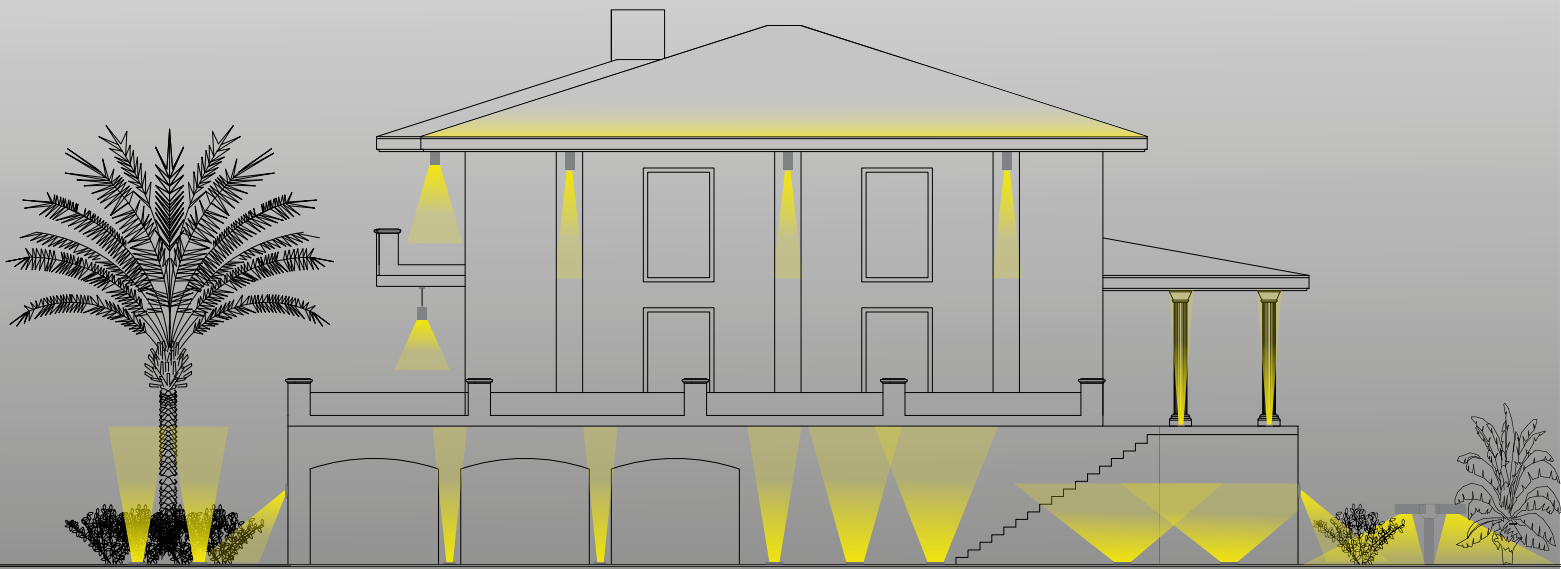

Who We Are ?


Established in 1961 in Mumbai, India, Rajkamal Trading Corporation swiftly ascended as a premier manufacturer of diverse lighting fixtures, spanning chandeliers, table lamps, wall lamps, and custom fittings. Renowned for their exquisite design and enduring durability, these products garnered widespread acclaim through rigorous quality control and an in-house design studio. By 1971, the company initiated major exports, propelling growth across Asia and the Middle East. Notable clients such as the Taj Group, Oberoi Group, and Sheraton Hotels favor Rklite (Rajkamal Trading Corporation) for their lighting fixture needs, solidifying its industry standing.

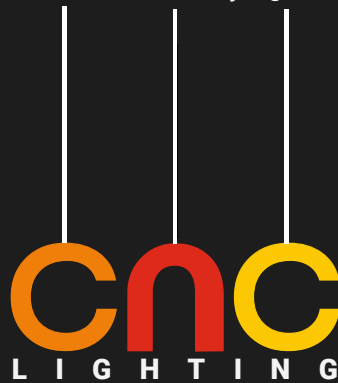

**PROUDLY
MADE IN
BHARAT**

In 2010, Rajkamal introduced Rklite, specializing in outdoor landscape lighting, and CNC, offering imported lighting solutions. The merger in 2022 formed CNC Lighting, focusing on architectural lighting solutions with a comprehensive range of high-reliability fixtures sourced from OEM/OEM brands worldwide. CNC's in-house team drives innovation, with products undergoing meticulous quality checks. Their dedication to research, innovation, and design ensures solutions tailored to architectural and design requirements. By integrating with projects, CNC ensures timely execution and meets end-users' expectations. Continual investment in research and innovation enables CNC to maintain competitive pricing without compromising quality. CNC aims to foster long-term partnerships, expanding its global network and distributor circle while delivering exceptional value.

Why Choose Us ?

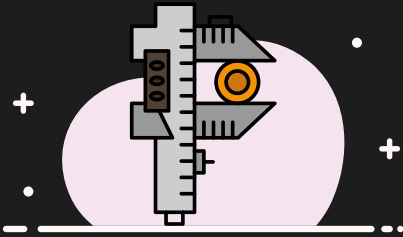

ENGINEERED PRECISION

Crafted for enduring outdoor brilliance. Trusted for superior quality, versatility, and unwavering reliability.



PREMIUM CRAFTSMANSHIP

Delivering lasting lighting solutions of unparalleled quality. Innovative design, steadfast performance, and adaptable options for all requirements.



INNOVATIVE EXCELLENCE

Innovative outdoor lighting fixtures boast cutting-edge design, advanced optics, and unparalleled performance for exceptional illumination and functionality.



RELIABLE

RELIABILITY REDEFINED

Outdoor lighting fixtures stand as steadfast beacons, illuminating with enduring brilliance and unwavering dependability in any environment.



ENDURING BRILLIANCE

Outdoor lighting fixtures shine brightly with enduring brilliance, boasting resilience, durability, and steadfast reliability in the face of harsh environmental conditions.



SUSTAINABILITY

Sustainability is our foundation, defining our strength and competitive edge, shaping our essence, guiding our success, and reinforcing our brand identity in the market.



HUMAN CENTRIC

CNC has devoted extensive years to the meticulous research and development of optics, with a central focus on augmenting anti-glare safety measures. Emphasizing the preservation of visual comfort and the safeguarding of human ocular health across varied environments, CNC underscores its commitment to the holistic well-being of humanity.

MODULARITY


The incorporation of modular design for internal components not only streamlines maintenance, replacement, and production processes but also enhances flexibility, fostering environmental efficiency and sustainability.

SERVICEABILITY

We offer maintenance services post-warranty, enabling product upgrades and replacements without necessitating the replacement of lighting fixtures.




CNC LATHE MACHINE

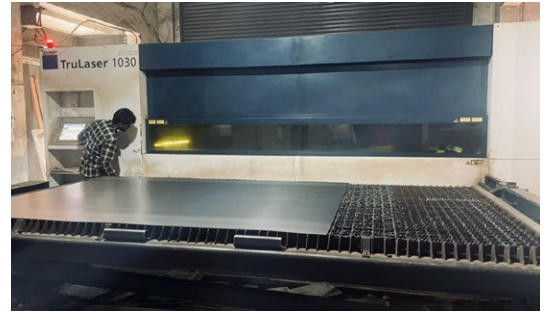


CNC FIBER LASER CUTTING



CNC BENDING MACHINE

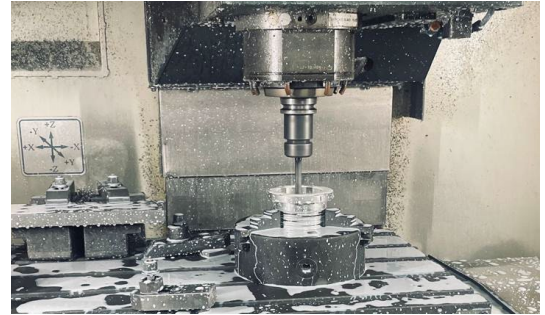

VMC ATC 24 TOOL CHANGER

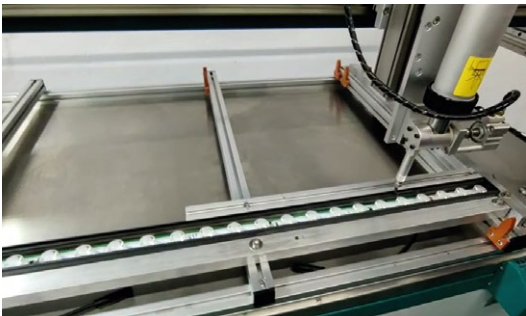

AT-GLUE DISPENCING MACHINE



POWDER COATING MACHINE



LATHE MACHINE




WELDING MACHINE

CONTENT

GROUND RECESSED

Page 24 - 33




TERRA ING 40




TERRA ING 55



TERRA ING 55 INT




TERRA ING 85 D3




TERRA ING 140




TERRA ING 150



TERRA ING 85 ASY




TERRA ING 140 ASY




TERRA ING 150 ASY

STEP LIGHT FIXTURES


Page 34 - 41




TERRA SL 40 GC



TERRA SL 55 GC




TERRA SL 55 INT GC



TERRA SL 140 ASY



TERRA SL 150 ASY



TERRA SL 55 R



TERRA SL 55 S



TERRA SL 55 SMILEY

WALL MOUNT FIXTURES

Page 42 - 51



BOXY WM 39



BOXY WM 39 UD



BOXY WM 75 D3



BOXY WM 75 COB



BOXY WM 75 ASY



BULLET WM 61 D3



BULLET WM 61D COB



BULLET WM 61UD D3



BULLET WM 88 HP



BULLET WM 88 COB

CONTENT

CEILING MOUNT FIXTURES

Page 52 - 55



BOXY CM 75 D3



BULLET CM 61 D3



BULLET CM 61D COB




BULLET CM 88 COB

PROJECTORS


Page 56 - 73



CIELO SP 32



CIELO SP 64 D3




CIELO SP 64 COB




CIELO SP 118




LUGAR SP 41




LUGAR SP 61 COB



LUGAR SP 64 D3



LUGAR SP 64 COB




SHADOW SP 41 HP



SHADOW SP 41 COB



SHADOW SP 50 HP



SHADOW SP 50 COB



SHADOW SP 61 COB



SHADOW SP 64 COB



SHADOW SP 65 COB



SHADOW SP 88 HP



SHADOW SP 88 COB



NOVA SP 41



NOVA 41 HP/COB



NOVA 50 COB



NOVA 64 COB

BOLLARDS

Page 74- 83



YODA




AURIGA



PILLER



MUSHO



PERSEUS



PYXIS



NARROWLINE



MONO



SETTE




ANGLE



PERCH



ALTAR



PINE

LINAER WALL WASHER

Page 84 - 87




HERMIT LWV 29




HERMIT LWV 42

AQUA

Page 88 - 89




AQUA 55 L



AQUA 41



ORDER CODE GUIDE

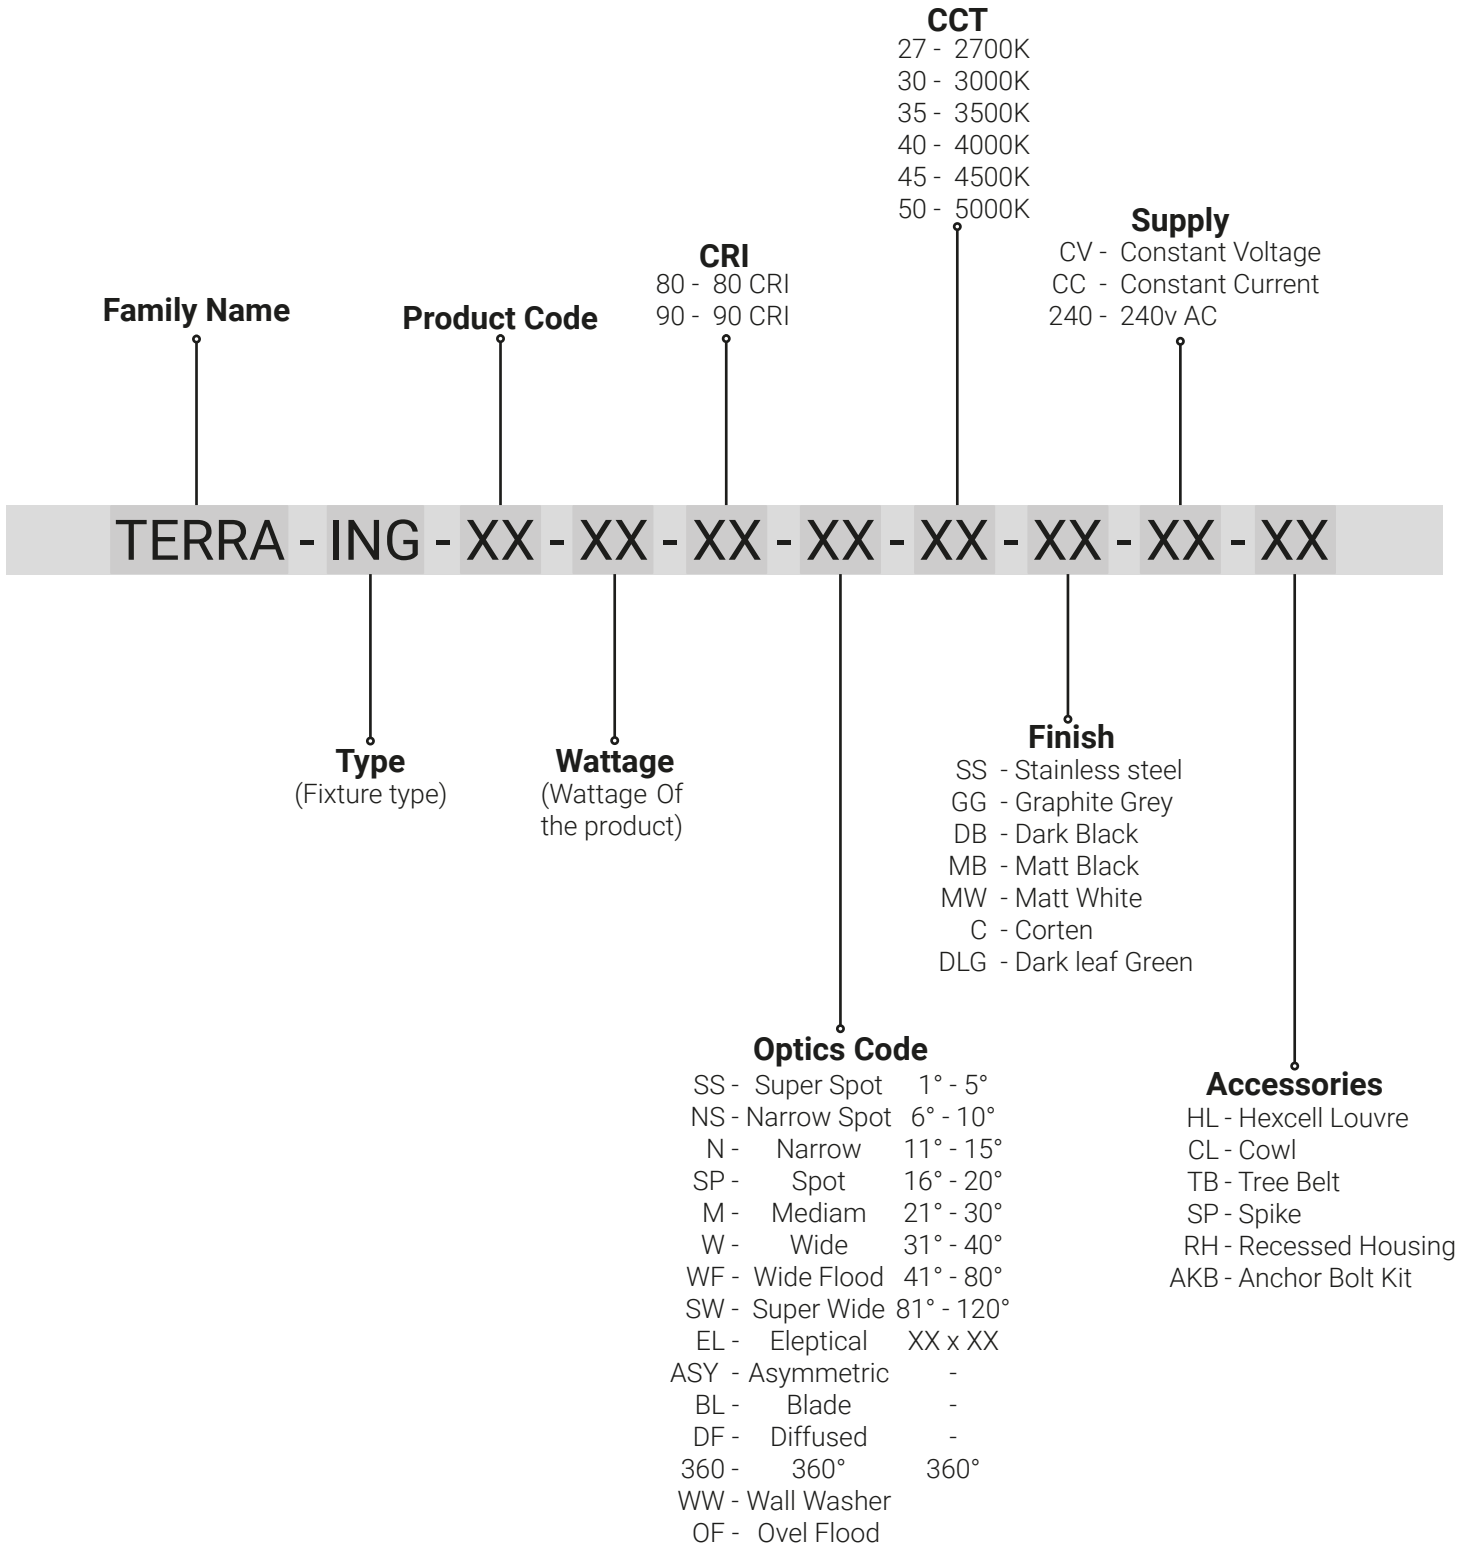



OUR PARTNERS

LEDiL®

KHATOD

bridgelux®
Bridging Light and Life™

CREE ⇄

CITIZEN

OSRAM

MW
MEAN WELL

FULHAM®
Harness the Horsepower

P PYROTECH
CREATIVE LED LIGHTING



RKLITE

SINCE 1961





cnc LIGHTING

MAKE IN INDIA

cnc
LIGHTING

BY
RKLITE
SINCE 1961





cnc
MEDIA FACADE

cn
MEDIA FACADE



RKLITE
Since 1963



RKLITE

Decorative Lighting
Hotel Lighting

CNC
LIGHTING
BY
RKLITE
SINCE 1963

MANUFACTURED
IN
INDIA

CNC
LIGHTING
BY
RKLITE
SINCE 1963



CNC
LIGHTING
BY
RKLITE
SINCE 1961



RKLITE



Bespoke lighting
Hotel lighting



PINE

AUTUMN



cnc
LIGHTING
BY
RKLITE
SINCE 1961

MANUFACTURED
IN
INDIA

MUSHO

BOXY

CEILO

LUG









west elm

LAUNCHING INDIA'S FIRST ROOFTOP
DRIVE-IN THEATRE



EXPERIENCE
THEATRE

EVENT HOSTING SERVICES



JIO WORLD DRIVE






Recessed IP67 inground uplighter available in various optics from narrow to wide flood ideal for lighting up application like sidewalks, columns, gardens, pathways, etc.




• Protection against water
• Infiltrations through cables.

Dimension (mm):

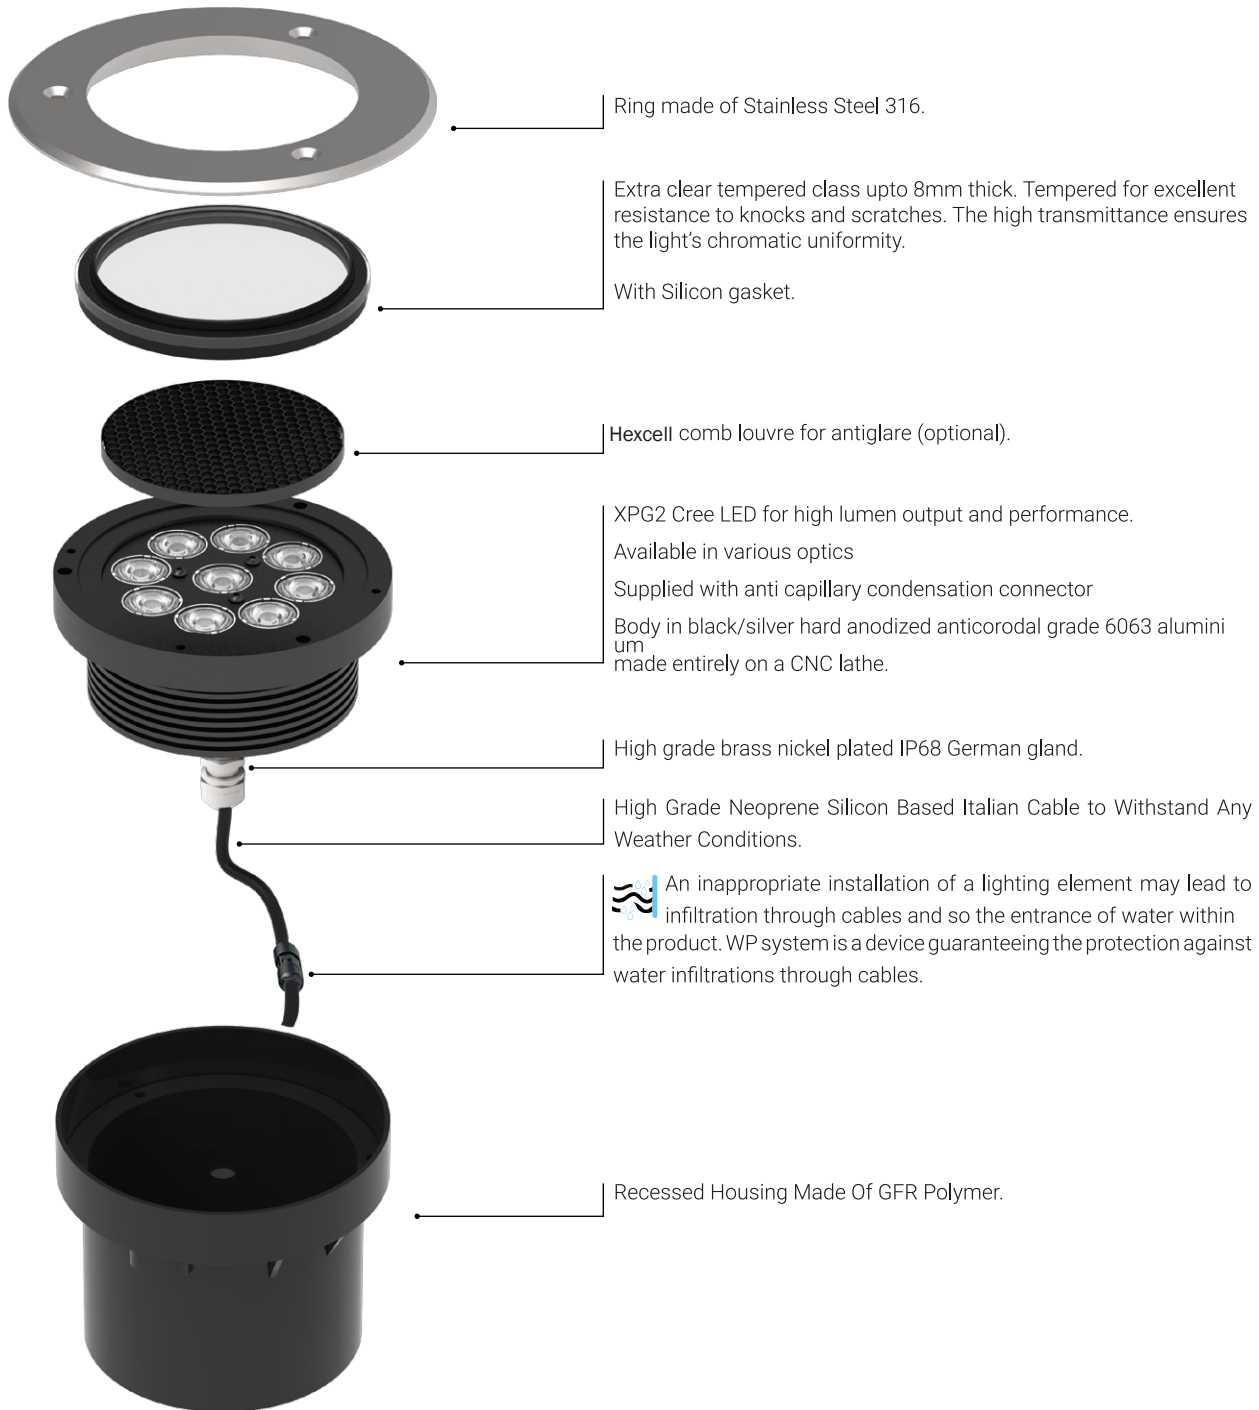

Dimension (mm):







GROUND RECESSED


FEATURES

- Material:** Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.
- Finish:** Stainless Steel (SS)
- Installation:** High-Efficiency Optical System
Extra Clear Glass To Increase Efficiency Of The Fixture.
High Grade Silicon Gasket- Heat & Cold Resistant.
High Grade Brass Nickel Plated German Gland.
- Cable:** 2x 0.75sqmm 2 Core Cable High-Grade Neoprene Silicon-Based
Italian Cable To Withstand Any Weather Condition



Finishes

-  Stainless Steel (SS)

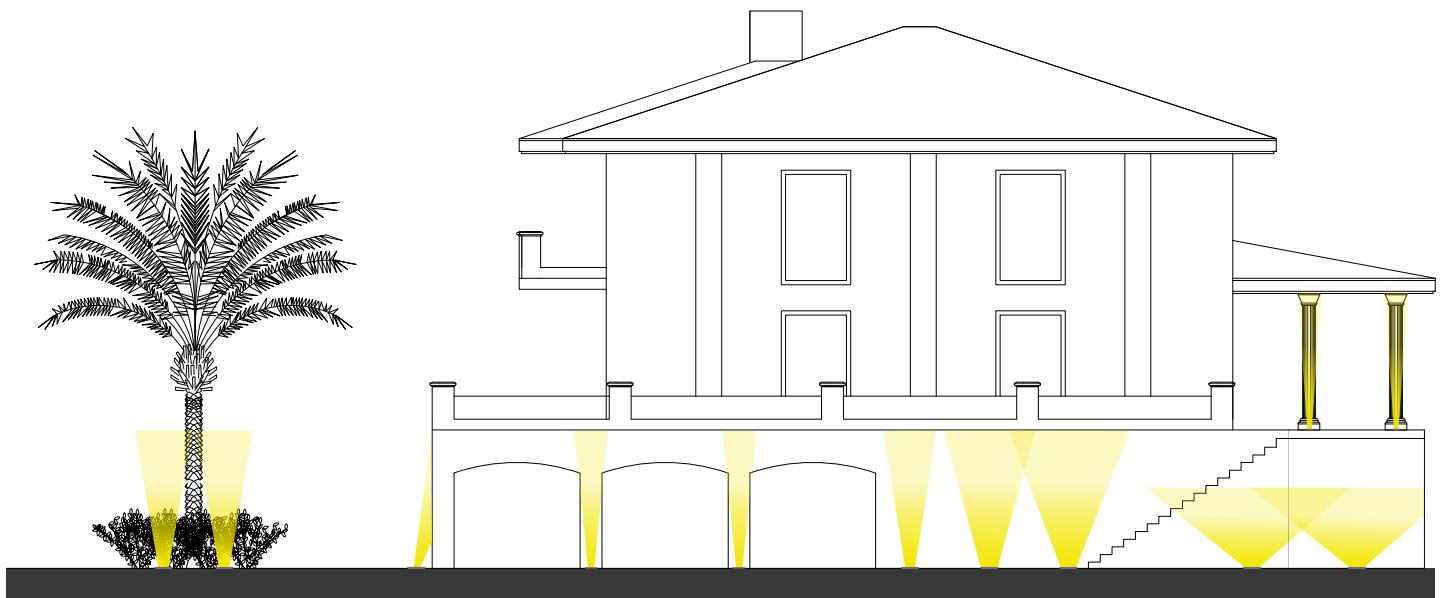

TERRA ING 40




Specification


CODE	- Terra ING 40
WATTAGE	- 1W / 1.5W
LUMEN	- 120lm / 180lm
CRI	- 80
OPTICS	- 12°/ 24°/ 40°/ 60°/ 20x40°/ DF
CCT	- 2700/ 3000/ 4000K
FINISH	- Stainless Steel
SUPPLY	- CC - 3V, 350mA/ 500mA/ CV - 24VDC
ACCESSORIES	- HL/ RH/GC



Dimension (mm):

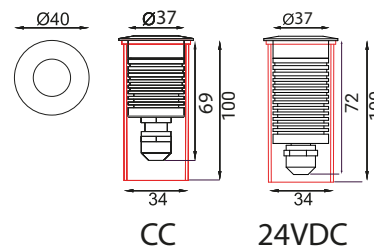

Accessories



TERRA ING 55




Specification


CODE	- Terra ING 55
WATTAGE	- 1.5W / 2W
LUMEN	- 180lm / 240lm
CRI	- 80
OPTICS	- 12°/ 24°/ 40°/ 60°/ 20x40°/ DF
CCT	- 2700/ 3000/ 4000K
FINISH	- Stainless Steel
SUPPLY	- CC - 3V, 500mA / 700mA / CV - 24VDC
ACCESSORIES	- HL/ RH/GC



Dimension (mm):

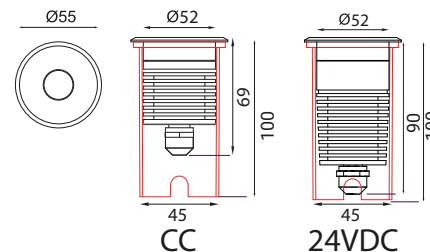

Accessories



TERRA ING 55 INT




Dimension (mm):




Specification


- CODE - Terra ING 55 INT
- WATTAGE - 2.5W / 3W / 5.5W
- LUMEN - 300lm / 360lm / 550lm
- CRI - 80
- OPTICS - 12° / 24° / 40° / 60° / 20x40° / DF
- CCT - 2700 / 3000K
- FINISH - Stainless Steel
- SUPPLY - 230v AC
- ACCESSORIES - HL / RH / GC

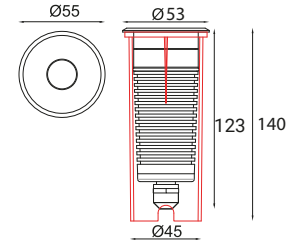

Accessories

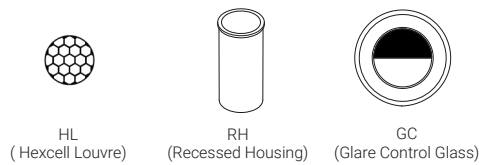

TERRA ING 85




Dimension (mm):




Specification

- CODE - Terra ING85-D3
- WATTAGE - 6W
- LUMEN - 540lm
- CRI - 80
- OPTICS - 12° / 18° / 54° / DF
- CCT - 2700 / 3000 / 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 9V, 700mA / CV - 24V DC
- ACCESSORIES - HL / RH

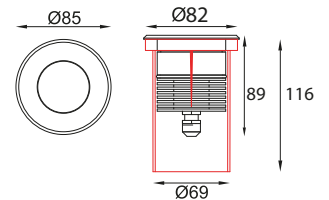

CC/24VDC


Accessories






TERRAINGROUNDS

TERRA ING 140



Dimension (mm):

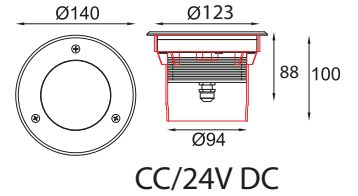


Specification

- CODE - Terra ING 140
- WATTAGE - 12W
- LUMEN - 1080lm
- CRI - 80
- OPTICS - 12°/ 24°/ 40°/ 60°/ DF
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 18V, 700mA / CV - 24VDC
- ACCESSORIES - HL/ RH




Accessories



TERRA ING 150



Dimension (mm):

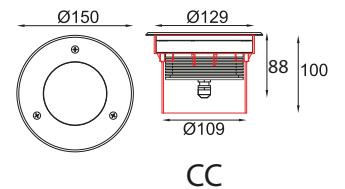


Specification

- CODE - Terra ING 150
- WATTAGE - 18W
- LUMEN - 1620lm
- CRI - 80
- OPTICS - 12°/ 24°/ 40°/ 60°/ DF
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 27V, 700mA
- ACCESSORIES - HL/ RH




Accessories



TERRA ING 85 ASY




Dimension (mm):



Specification


CODE	- Terra ING 85-ASY
WATTAGE	- 5W
LUMEN	- 605lm
CRI	- 80
OPTICS	- ASY
CCT	- 2700/ 3000K
FINISH	- Stainless Steel
SUPPLY	- CC - 12V, 400mA / CV - 24VDC
ACCESSORIES	- RH

Asymmetric

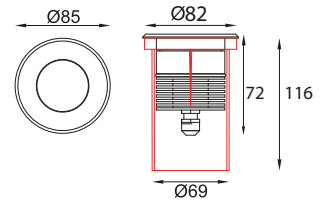

CC/24V DC

Accessories



RH
(Recessed Housing)





TERRA ING 140 ASY





Dimension (mm):



Specification


- CODE - Terra ING 140-ASY
- WATTAGE - 6W / 8W
- LUMEN - 540lm / 720lm
- CRI - 80
- OPTICS - ASY/20x40°
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 12V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH

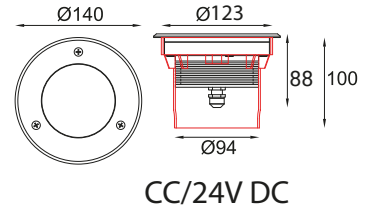


Accessories



RH
(Recessed Housing)



TERRA ING 150 ASY





Dimension (mm):




Specification


- CODE - Terra ING 150-ASY
- WATTAGE - 9W/12W
- LUMEN - 810lm/ 1080lm
- CRI - 80
- OPTICS - ASY/ 20x40°
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 18V, 500mA/ 700mA / CV - 24VDC
- ACCESSORIES - RH

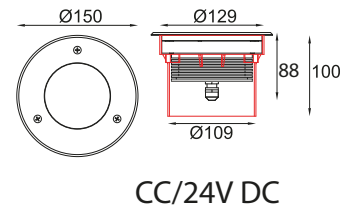

Accessories




RH
(Recessed Housing)




STEP LIGHT

FEATURES

- Material:** Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.
- Finish:** Stainless Steel (SS)
- Installation:** High-Efficiency Optical System
Extra Clear Glass To Increase Efficiency Of The Fixture.
High Grade Silicon Gasket- Heat & Cold Resistant.
High Grade Brass Nickel Plated German Gland.
- Cable:** 2x 0.75sqmm 2 Core Cable High-Grade Neoprene Silicon-Based
Italian Cable To Withstand Any Weather Condition



Finishes

-  Stainless Steel (SS)




TERRA SL 40 GC




Specification


CODE	- Terra SL 40-GC
WATTAGE	- 1W / 1.5W
LUMEN	- 120 lm / 180lm
CRI	- 80
OPTICS	- 12°/ 24°/ 40°/ 60°/ DF
CCT	- 2700/ 3000/ 4000K
FINISH	- Stainless Steel
SUPPLY	- CC - 3V, 350mA / 500mA / CV - 24VDC
ACCESSORIES	- RH

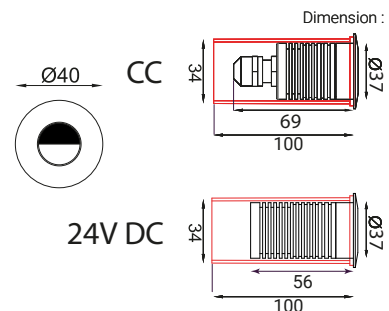

Accessories



RH
(Recessed Housing)




GC
(Glare Control Glass)

TERRA SL 55 GC




Specification


CODE	- Terra SL 55-GC
WATTAGE	- 1.5W / 2W
LUMEN	- 180lm / 240lm
CRI	- 80
OPTICS	- 12°/ 24°/ 40°/ 60°/ DF
CCT	- 2700/ 3000/ 4000K
FINISH	- Stainless Steel
SUPPLY	- CC - 3V, 500mA / 700mA / CV - 24VDC
ACCESSORIES	- RH

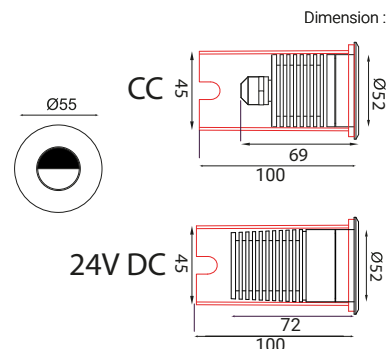

Accessories



RH
(Recessed Housing)



GC
(Glare Control Glass)



TERRA SL 55 INT GC



Specification

CODE	- Terra SL 55 INT-GC
WATTAGE	- 2W / 3W / 5.5W
LUMEN	- 300lm / 360lm / 550lm
CRI	- 80
OPTICS	- 12° / 24° / 40° / 60° / DF
CCT	- 2700 / 3000K
FINISH	- Stainless Steel
SUPPLY	- 230VAC
ACCESSORIES	- RH


Dimension :

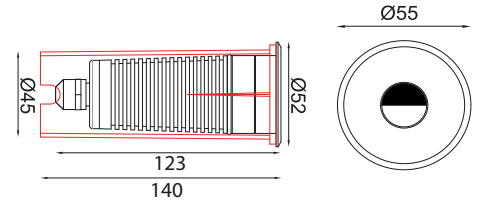


Accessories



RH
(Recessed Housing)



GC
(Glare Control Glass)

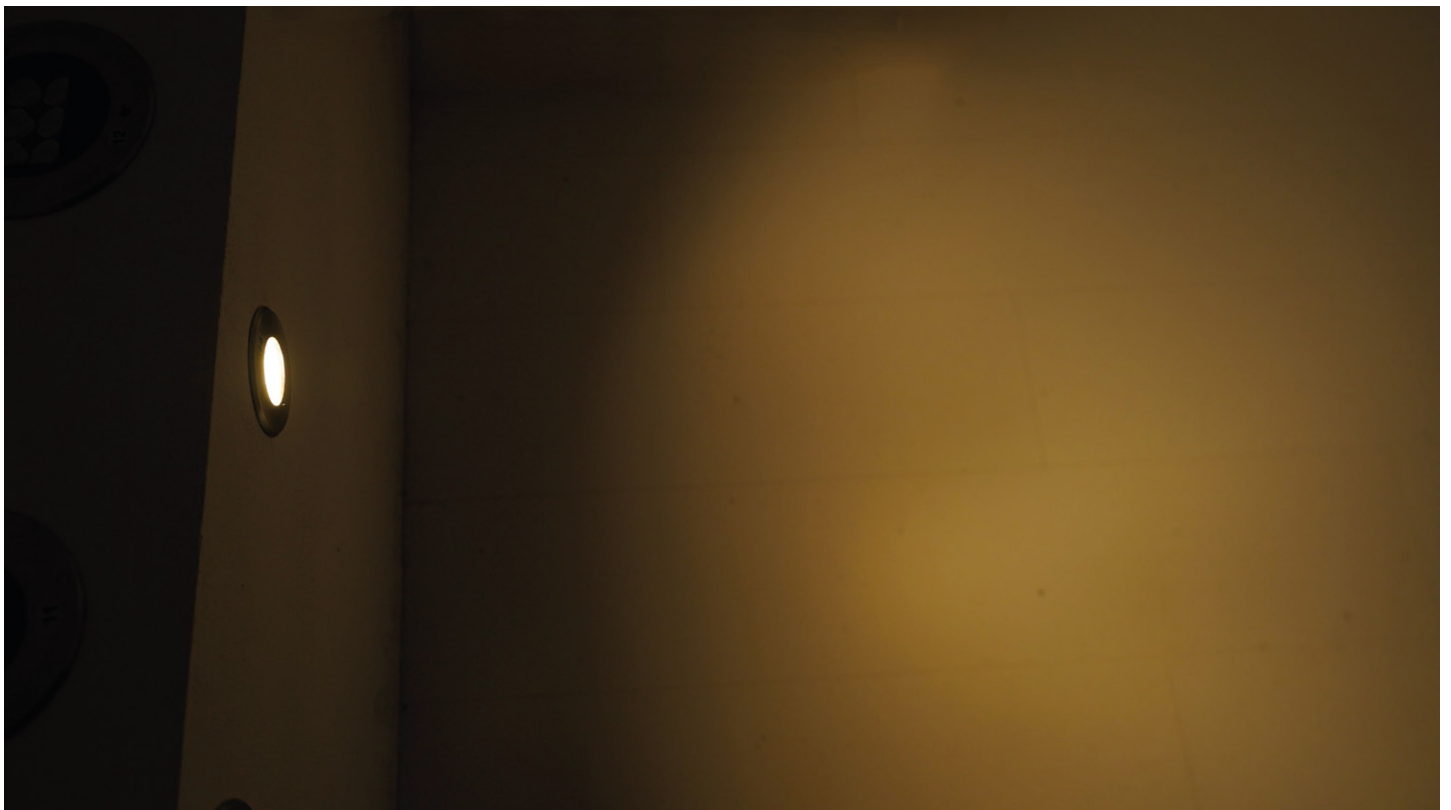




TERRA SL 140 ASY




Specification


- CODE - Terra SL 140-ASY
- WATTAGE - 6W / 8W
- LUMEN - 540lm / 720lm
- CRI - 80
- OPTICS - ASY/ 20x40°
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 12V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH



Dimension :

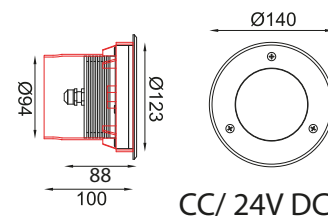

Accessories




RH
(Recessed Housing)

TERRA SL 150 ASY




Specification


- CODE - Terra SL 150 ASY
- WATTAGE - 9W / 12W
- LUMEN - 810lm/ 1080lm
- CRI - 80
- OPTICS - ASY/ 20x40°
- CCT - 2700/ 3000/ 4000K
- FINISH - Stainless Steel
- SUPPLY - CC - 18V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH



Dimension :

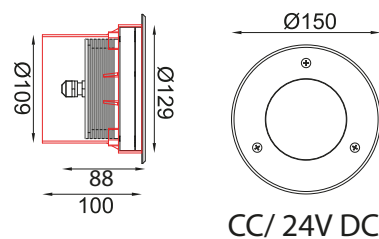

Accessories



RH
(Recessed Housing)

TERRA SL 55 R




Specification

- CODE - Terra SL 55-R
- WATTAGE - 1.5W / 2W
- LUMEN - 180lm / 240lm
- CRI - 80
- OPTICS - BL
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - CC - 3V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH




Dimension(mm) :

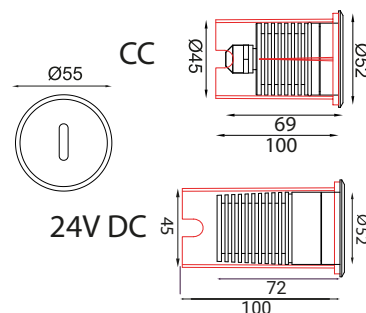

Accessories



RH
(Recessed Housing)



TERRA SL 55 S




Specification

- CODE - Terra SL 55-S
- WATTAGE - 1.5W / 2W
- LUMEN - 180lm / 240lm
- CRI - 80
- OPTICS - BL
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - CC - 3V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH




Dimension (mm):

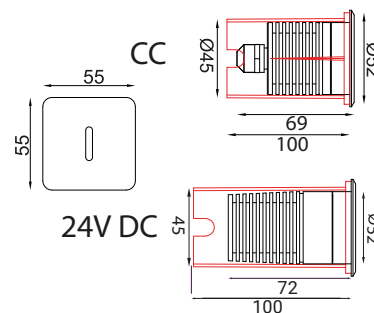


Accessories



RH
(Recessed Housing)




TERRA SL 55 SMILEY



Specification


- CODE - Terra SL 55 Smiley
- WATTAGE - 1.5W / 2W
- LUMEN - 180lm / 240lm
- CRI - 80
- OPTICS - DF
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - CC - 3V, 500mA / 700mA / CV - 24VDC
- ACCESSORIES - RH

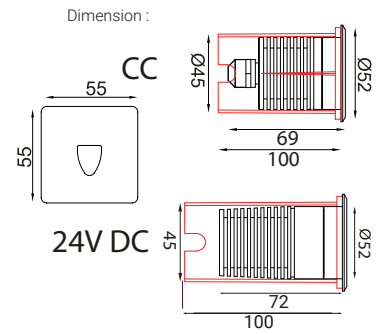

Accessories




RH
(Recessed Housing)

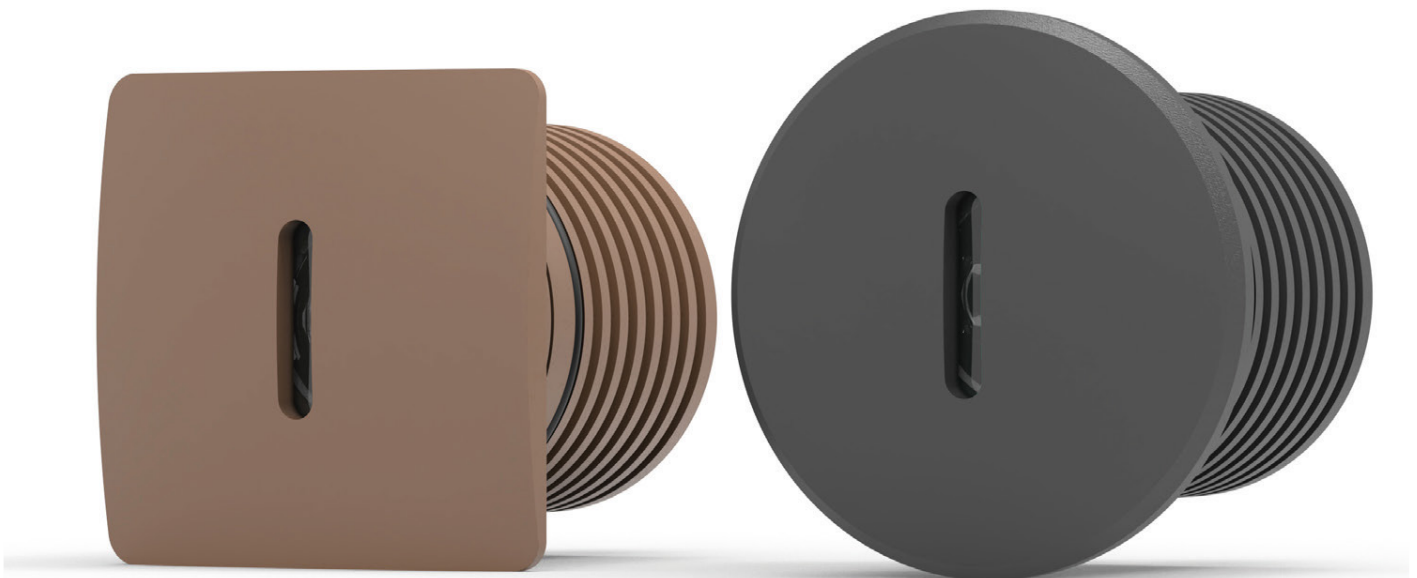

WALL MOUNT FIXTURES

FEATURES


- Material:** Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.
- Finish:** Grey, Dark Black, Matt White, Corten, Dark Leaf Green
- Installation:** High-Efficiency Optical System
Extra Clear Glass To Increase Efficiency Of The Fixture.
High Grade Silicon Gasket- Heat & Cold Resistant.
High Grade Brass Nickel Plated German Gland.
- Cable:** 2x 0.75sqmm 2 Core Cable High-Grade Neoprene Silicon-Based
Italian Cable To Withstand Any Weather Condition



Finishes




BOXY WM 39



Specification

- CODE - BOXY WM 39
- WATTAGE - 2.5W
- LUMEN - 300lm
- CRI - 80
- OPTICS - 12°/ 24°/ 40°/ 60°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL

Dimension :




Accessories



HL
(Hexcell Louvre)


BOXY WM 39 UD



Specification

- CODE - BOXY WM 39-UD
- WATTAGE - 5W (2.5W + 2.5W)
- LUMEN - 600lm(300lm + 300lm)
- CRI - 80
- OPTICS - 12°/ 24°/ 40°/ 60°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL


Dimension :



Accessories



HL
(Hexcell Louvre)

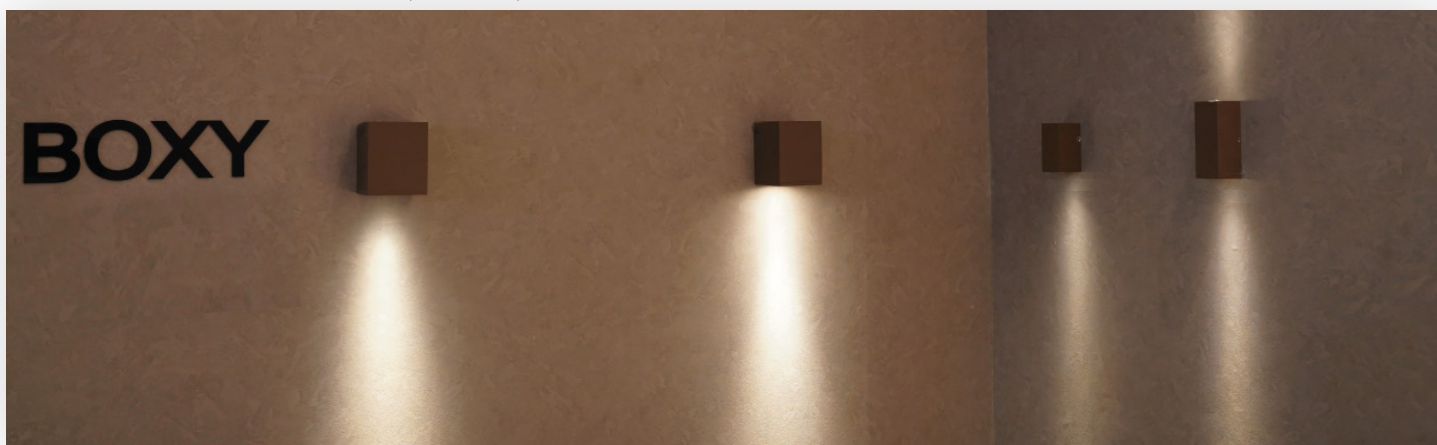



Prateek Group
Creating Landmarks, Setting Benchmarks

Sustainable

to create sustainable value through
innovation in real estate


AND CITY

SALES OFFICE

We build
the trust in a simple way
and deliver the promise





BOXY WM 75 D3



Specification

- CODE - BOXY WM 75-D3
- WATTAGE - 7W
- LUMEN - 540lm
- CRI - 80
- OPTICS - 12° / 18° / 54°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL

Dimension :




Accessories



HL
(Hexcell Louvre)



BOXY WM 75 COB



Specification

- CODE - BOXY WM 75-COB
- WATTAGE - 8W
- LUMEN - 760lm
- CRI - 80
- OPTICS - 18° / 24° / 36°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL

Dimension :



Accessories



HL
(Hexcell Louvre)




26



25


BOXY WM 75 ASY



Specification

CODE	-	BOXY WM 75-ASY
WATTAGE	-	3W/ 5.5W
LUMEN	-	240lm/ 550lm
CRI	-	80
OPTICS	-	ASY
CCT	-	2700/ 3000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	

Dimension :




Asymmetric



Accessories


BULLET WM 61 D3



Specification

CODE	-	BULLET WM 61-D3
WATTAGE	-	7W
LUMEN	-	540lm
CRI	-	80
OPTICS	-	12° / 18° / 54°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :



Accessories




HL
(Hexcell Louvre)

BULLET





BULLET WM 61D COB



Specification

CODE	-	BULLET WM 61D-COB
WATTAGE	-	8W
LUMEN	-	760lm
CRI	-	80
OPTICS	-	16° / 27° / 38°
CCT	-	2700 / 3000 / 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :




Accessories



HL
(Hexcell Louvre)


BULLET WM 61UD D3



Specification

CODE	-	BULLET WM 61UD-D3
WATTAGE	-	14W (7W + 7W)
LUMEN	-	1230lm (630lm + 630lm)
CRI	-	80
OPTICS	-	12° / 18° / 54°
CCT	-	2700 / 3000 / 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :

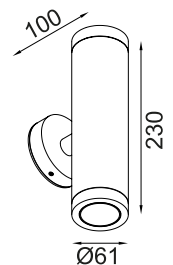


Accessories



HL
(Hexcell Louvre)



BULLET WM 88 HP



Specification

CODE	-	BULLET WM 88-HP
WATTAGE	-	16W
LUMEN	-	1760lm
CRI	-	80
OPTICS	-	12°/ 24°/ 40°/ 60°
CCT	-	2700/ 3000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :

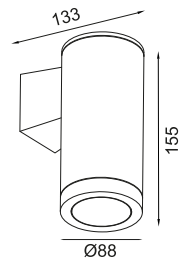


Accessories



HL
(Hexcell Louvre)


BULLET WM 88 COB



Specification

CODE	-	BULLET WM 88-COB
WATTAGE	-	16W
LUMEN	-	1680lm
CRI	-	80
OPTICS	-	14°/ 27°/ 37°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :

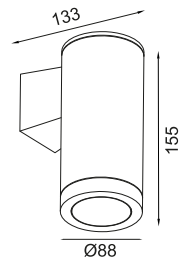

Accessories



HL
(Hexcell Louvre)

CEILING MOUNT FIXTURES


FEATURES

Material: Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.

Finish: Grey, Dark Black, Matt White, Corten, Dark Leaf Green

Installation: High-Efficiency Optical System
Extra Clear Glass To Increase Efficiency Of The Fixture.
High Grade Silicon Gasket- Heat & Cold Resistant.
High Grade Brass Nickel Plated German Gland.


Cable: 2x 0.75sqmm 2 Core Cable High-Grade Neoprene Silicon-Based
Italian Cable To Withstand Any Weather Condition

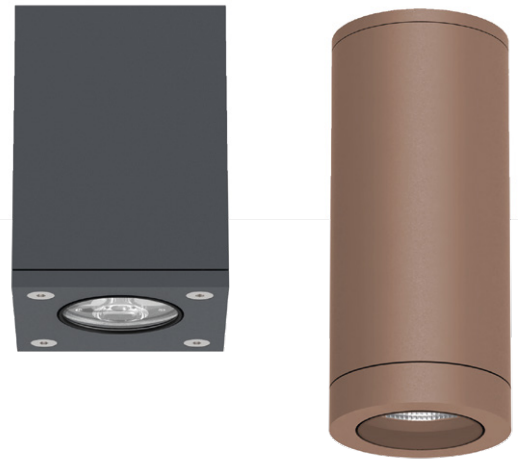

Finishes




BOXY CM 75 D3



Specification

CODE	-	BOXY CM 75-D3
WATTAGE	-	7W
LUMEN	-	540lm
CRI	-	80
OPTICS	-	12°/ 18°/ 54°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :



Accessories




HL
(Hexcell Louvre)



CPK
(Ceiling Pendant Kit)


BULLET CM 61 D3



Specification

CODE	-	BULLET CM 61-D3
WATTAGE	-	7W
LUMEN	-	540lm
CRI	-	80
OPTICS	-	12°/ 18°/ 54°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	HL

Dimension :



Accessories



HL
(Hexcell Louvre)



CPK
(Ceiling Pendant Kit)




BULLET CM 61D COB



Specification

CODE	- BULLET CM 61D-COB
WATTAGE	- 8W
LUMEN	- 760lm
CRI	- 80
OPTICS	- 16° / 27° / 38°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- 230VAC
ACCESSORIES	- HL

Dimension :



Accessories



HL
(Hexcell Louvre)



CPK
(Ceiling Pendants Kit)



BULLET CM 88 COB



Specification

NAME	- BULLET CM 88-COB
WATTAGE	- 16W
LUMEN	- 1680lm
CRI	- 80
OPTICS	- 14° / 27° / 37°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- 230VAC
ACCESSORIES	- HL

Dimension :



Accessories



HL - 20
(Hexcell Louvre)



CPK
(Ceiling Pendants Kit)



cncTECH

Adjustable IP66 projectors available in various beam angles- super spot, narrow, wide and wide flood for indoor and outdoor floor, wall and ceiling applications ideal for lighting of statue, trees, shrubs, entrance, façades etc.



An inappropriate installation of a lighting element may lead to infiltration through cables and so the entrance of water within the product. WP system is a device guaranteeing the protection against water infiltrations through cables.




High Grade Neoprene Silicon Based Italian Cable to Withstand Any Weather Conditions.

High grade brass nickel plated IP68 German gland.

Bracket made of SS304. Special SS insert to ensure high-strength threading.

Body in black/silver hard anodized processed with "Weatherprotect" outdoor rated powder coating. spike made of anticorodal grade 6063 aluminium entirely on a CNC lathe.

Aluminium cowl for anti-glare/Honey comb louvre (optional).

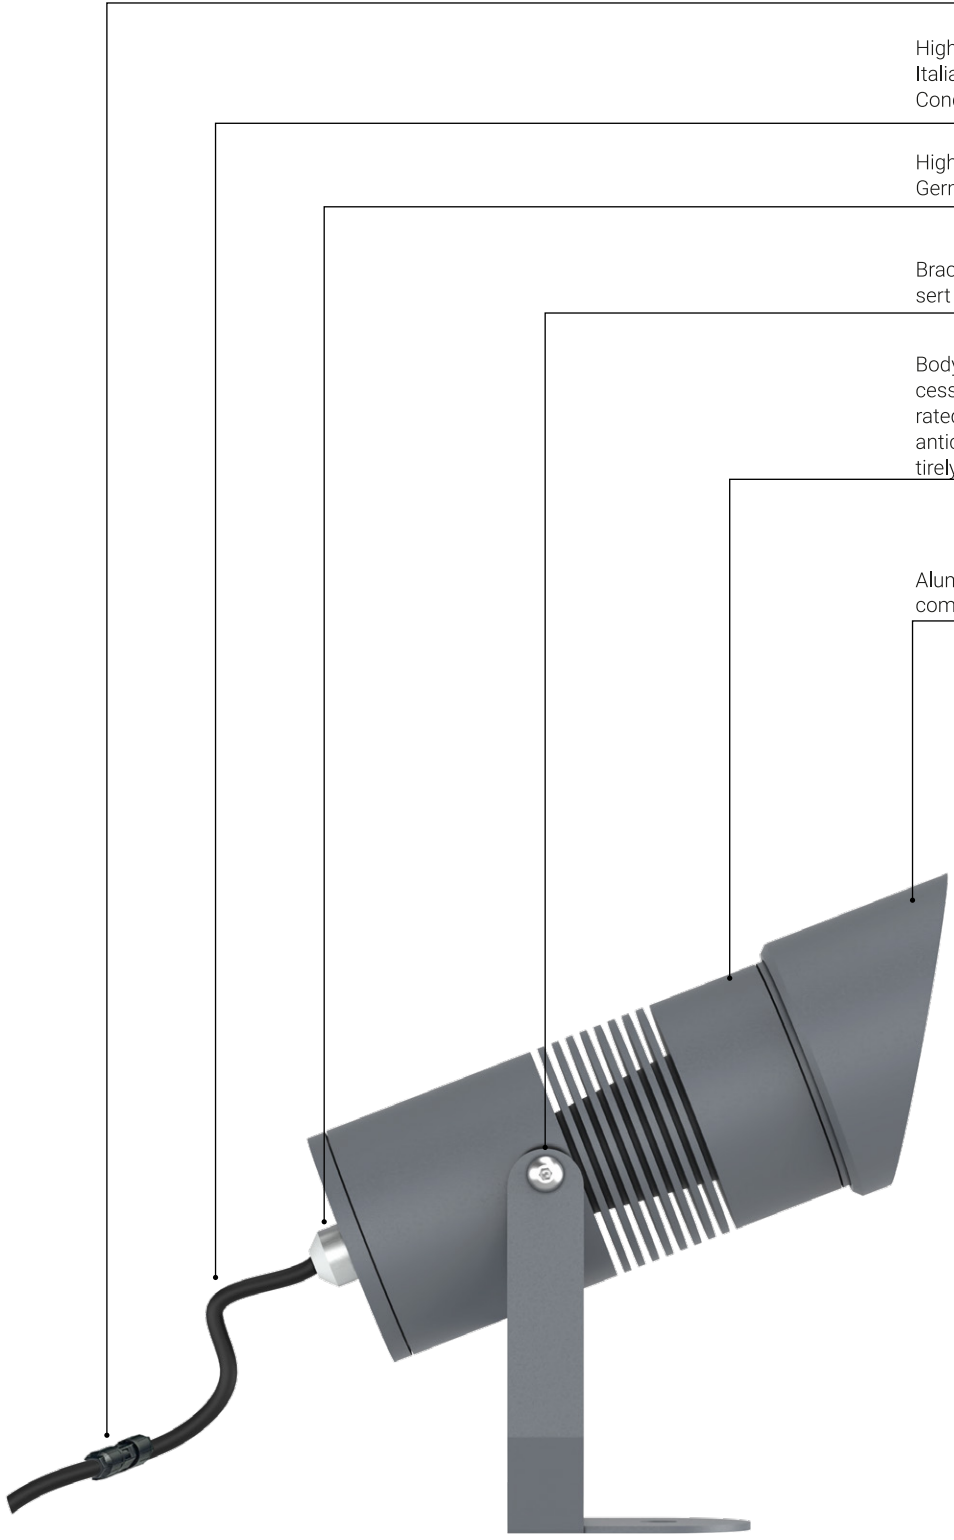




PROJECTORS

FEATURES


- Material:** Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.
- Finish:** Grey, Dark Black, Matt White, Corten, Dark Leaf Green
- Installation:** High-Efficiency Optical System
Extra Clear Glass To Increase Efficiency Of The Fixture.
High Grade Silicon Gasket- Heat & Cold Resistant.
High Grade Brass Nickel Plated German Gland.
- Cable:** 2x 0.75sqmm 2 Core Cable High-Grade Neoprene Silicon-Based Italian Cable To Withstand Any Weather Condition




Finishes



CIELO SP 32




Dimension (mm):

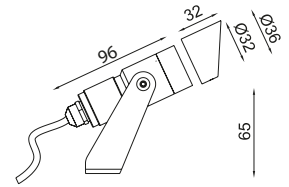

Specification


CODE	-	CIELO SP 32
WATTAGE	-	2W
LUMEN	-	240lm
CRI	-	80
OPTICS	-	12° / 24° / 40° / 60°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	CC - 3V, 700mA
ACCESSORIES	-	HL / CL / TB / SP




Accessories



CIELO SP 64 D3




Dimension (mm):

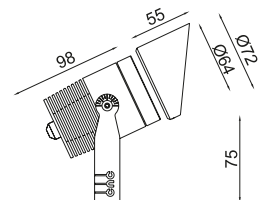

Specification

CODE	-	CIELO SP 64-D3
WATTAGE	-	6W
LUMEN	-	540lm
CRI	-	80
OPTICS	-	12° / 18° / 54°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	CC - 9V, 700mA
ACCESSORIES	-	HL / CL / TB / SP



Accessories




CIELO SP 64 COB




Specification

CODE	- CIELO SP 64-COB
WATTAGE	- 9W
LUMEN	- 840lm
CRI	- 80
OPTICS	- 16°/ 27°/ 38°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- CC - 36V, 250mA
ACCESSORIES	- HL / CL / TB / SP



Dimension (mm):

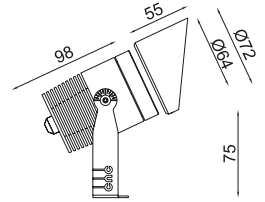

Accessories




CIELO SP 118





Specification

CODE	- CIELO SP 118
WATTAGE	- 18W
LUMEN	- 1620lm
CRI	- 80
OPTICS	- 12°/ 24°/ 40°/ 60°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- CC - 27V, 700mA
ACCESSORIES	- HL / CL / TB / SP



Dimension (mm):

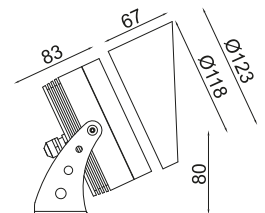

Accessories





LUGAR SP 41




Specification

- CODE - Lugar SP 41
- WATTAGE - 3W / 6W
- LUMEN - 240lm / 480lm
- CRI - 80
- OPTICS - 12° / 24° / 40° / 60°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

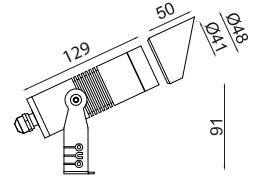

230v AC/ 24V DC

Accessories



HL
(Hexcell Louvre)



CL
(Cow)



TB
(Tree Belt)



SP
(Spike)

*4000K Is Not Available in 6W




LUGAR SP 61 COB




Specification

- CODE - Lugar SP 61-COB
- WATTAGE - 8W
- LUMEN - 760lm
- CRI - 80
- OPTICS - 16° / 27° / 38°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

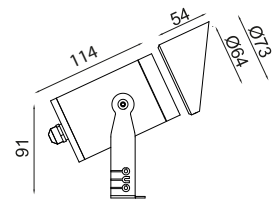

230v AC/ 24V DC

Accessories



HL
(Hexcell Louvre)




CL
(Cow)



TB
(Tree Belt)



SP
(Spike)








LUGAR SP 64 D3




Specification

- CODE - Lugar SP 64-D3
- WATTAGE - 7W
- LUMEN - 540lm
- CRI - 80
- OPTICS - 12°/ 18°/ 54°/ DF
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):



230v AC/ 24V DC



Accessories




LUGAR SP 64 COB




Specification


- CODE - Lugar SP 64-COB
- WATTAGE - 10W
- LUMEN - 1050lm
- CRI - 80
- OPTICS - 16°/ 27°/ 38°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP




Dimension (mm):

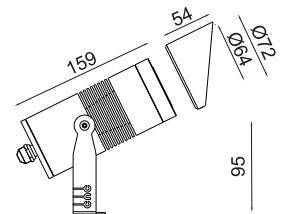

230v AC/ 24V DC



Accessories




SHADOW SP 41 HP





Specification

- CODE - SHADOW SP 41-HP
- WATTAGE - 3W / 6W
- LUMEN - 240lm / 480lm
- CRI - 80
- OPTICS - 12° / 24° / 40° / 60°
- CCT - 2700 / 3000 / 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC / CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

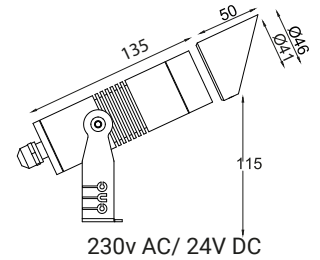

Accessories



HL
(Hexcell Louvre)




CL
(Cowl)



TB
(Tree Belt)



SP
(Spike)




SHADOW SP 41 COB





Specification

- CODE - SHADOW SP 41-COB
- WATTAGE - 6W
- LUMEN - 600lm
- CRI - 80
- OPTICS - 19° / 24° / 36°
- CCT - 2700 / 3000 / 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC / CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

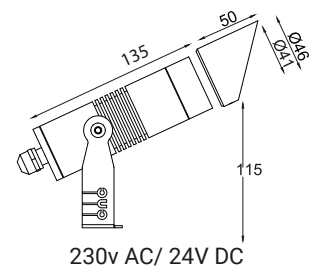

Accessories



HL
(Hexcell Louvre)




CL
(Cowl)




TB
(Tree Belt)



SP
(Spike)




SHADOW SP 50 COB




Specification

CODE	- SHADOW SP 50 COB
WATTAGE	- 8W
LUMEN	- 800lm
CRI	- 80
OPTICS	- 19° / 24° / 37°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- 230v AC/ CV - 24VDC
ACCESSORIES	- HL / CL / TB / SP

Dimension (mm):

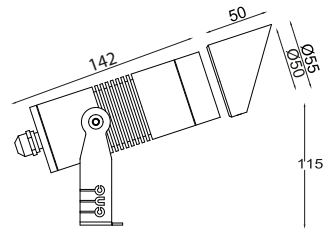

230v AC/ 24V DC



Accessories



HL
(Hexcell Louvre)




CL
(Cowl)



TB
(Tree Belt)




SP
(Spike)







SHADOW SP 61 COB




Specification

- CODE - SHADOW SP 61-COB
- WATTAGE - 8W
- LUMEN - 800lm
- CRI - 80
- OPTICS - 18°/ 27°/ 36°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP


Dimension (mm):

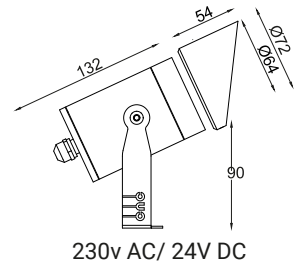

Accessories




SHADOW SP 64 COB




Specification

- CODE - SHADOW SP 64-COB
- WATTAGE - 10W
- LUMEN - 1050lm
- CRI - 80
- OPTICS - 18°/ 24°/ 36°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230v AC/ CV - 24VDC
- ACCESSORIES - HL / CL / TB / SP


Dimension (mm):

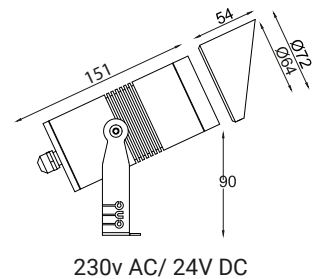

Accessories





SHADOW SP 65 COB




Specification

- CODE - SHADOW SP 65-COB
- WATTAGE - 15W
- LUMEN - 1425lm
- CRI - 80
- OPTICS - 18°/ 24°/ 36°
- CCT - 2700/ 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL / CL / TB / SP

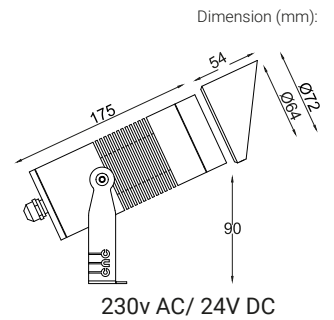

Accessories






SHADOW SP 88 HP




Specification

- CODE - SHADOW SP 88-HP
- WATTAGE - 18W
- LUMEN - 1980lm
- CRI - 80
- OPTICS - 12° / 24° / 40° / 60°
- CCT - 2700 / 3000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

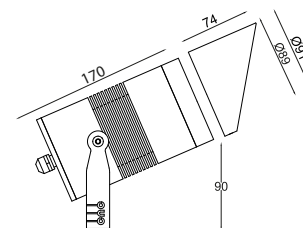

230v AC/ 24V DC

Accessories



HL
(Hexcell Louvre)



CL
(Cowl)



TB
(Tree Belt)



SP
(Spike)




SHADOW SP 88 COB




Specification

- CODE - SHADOW SP 88-COB
- WATTAGE - 18W
- LUMEN - 1890lm
- CRI - 80
- OPTICS - 14° / 27° / 37°
- CCT - 2700 / 3000 / 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - HL / CL / TB / SP



Dimension (mm):

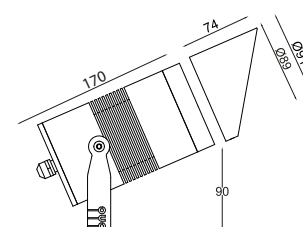

230v AC/ 24V DC

Accessories



HL
(Hexcell Louvre)




CL
(Cowl)



TB
(Tree Belt)



SP
(Spike)





NOVA SP 41




Specification

CODE	-	NOVA SP 41
WATTAGE	-	3W
LUMEN	-	300lm
CRI	-	80
OPTICS	-	12° / 24° / 40° / 60°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	HL / TB / SP



Dimension (mm):

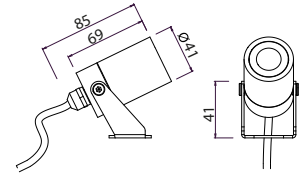

24V DC

Accessories



HL
(Hexcell Louvre)



TB
(Tree Belt)





SP
(Spike)

NOVA SP 41 HP/COB




Specification

CODE	-	NOVA SP 41 HP/COB
WATTAGE	-	6W
LUMEN	-	480lm/ 600lm
CRI	-	80
OPTICS	-	19° / 24° / 36°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	HL / TB / SP



Dimension (mm):

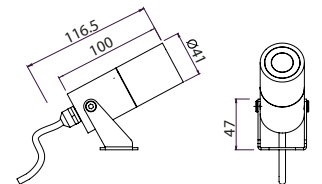

24V DC

Accessories




HL
(Hexcell Louvre)



TB
(Tree Belt)



SP
(Spike)

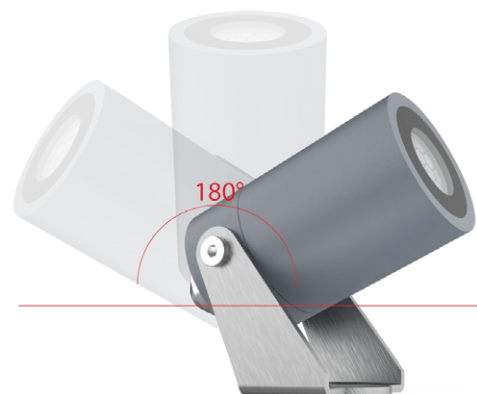


NOVA SP 50 COB




Specification


CODE	- NOVA SP50 COB
WATTAGE	- 8W
LUMEN	- 800lm
CRI	- 80
OPTICS	- 19°/ 24°/ 37°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- CV - 24VDC
ACCESSORIES	- HL / TB / SP



Dimension (mm):

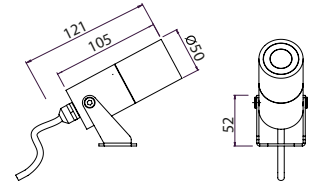

24V DC



Accessories

*4000K Is Not Available in 5W




NOVA SP 64 COB




Specification


CODE	- NOVA SP 64 COB
WATTAGE	- 10W
LUMEN	- 1000lm
CRI	- 80
OPTICS	- 18°/ 24°/ 36°
CCT	- 2700/ 3000/ 4000K
FINISH	- Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	- CV - 24VDC
ACCESSORIES	- HL / TB / SP



Dimension (mm):

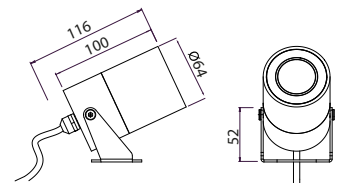

24V DC



Accessories


*4000K Is Not Available in 5W




BOLLARDS

FEATURES


- Material:** Sturdy Construction With Die-cast Or Extruded Aluminum Housing And Gi-Pipes. Stainless Steel Screws And Silicone Gaskets For Durability And Corrosion Resistance.
- Finish:** Available In Multiple Finishes, Including Grey, Dark Black, Matt White, Corten, And Dark Leaf Green. Corrosion-resistant Double-layer Polyester Powder-coated Finish, With Thermal Shock Resistance.
- Installation:** Designed To Seamlessly Blend With Modern City Landscapes. Various Designs Available For Different Lighting Needs. Parameters Like Mounting Height, Spacing, Outreach, And Drag Coefficient Are Considered For Optimal Installation. Convenient Power Unit Built Into The Bollard For Easy Setup.
- Cable:** Operates In Temperatures From -20°C To +55°C. Outstanding Light Efficiency, Suitable For Both Historic And Modern Environments. Both The Appearance And Materials Are Designed For Long-lasting Performance.



Finishes


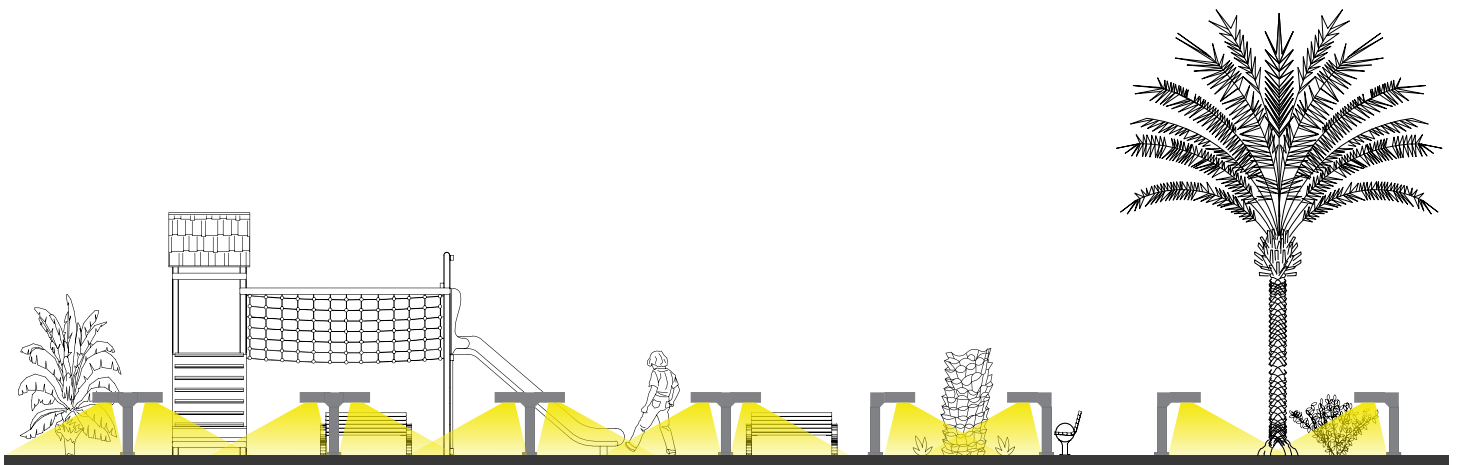


YODA

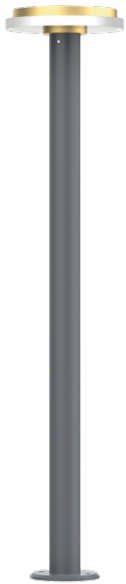

Specification

- CODE - YODA
- WATTAGE - 8W / 12W / 18W
- LUMEN - 770lm / 1150lm / 1710lm
- CRI - 80
- OPTICS - DF
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

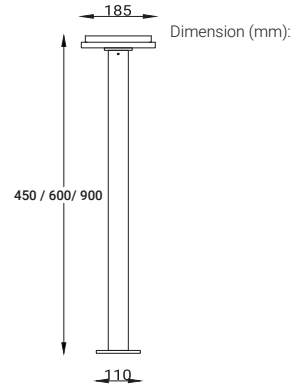

Accessories





*Also available in 450mm, 600mm and 900mm heights.

AURIGA



Specification

- CODEWATTAGE - AURIGA
- LUMEN - 8W / 12W
- CRI - 770lm / 1150lm
- OPTICS - 80
- CCT - DF
- FINISH - 3000/ 4000K
- SUPPLY - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- ACCESSORIES - 230VAC
- ABK

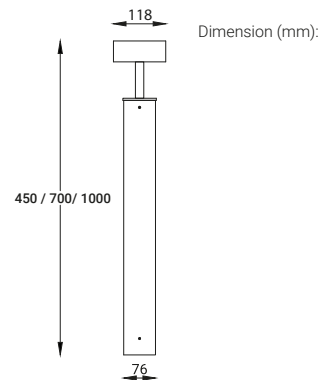

Accessories



*Also available in 450mm, 700mm and 1000mm heights.





PILLAR



Specification

- CODE - PILLER
- WATTAGE - 12W
- LUMEN - 1150lm
- CRI - 80
- OPTICS - DF
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK


Diffused

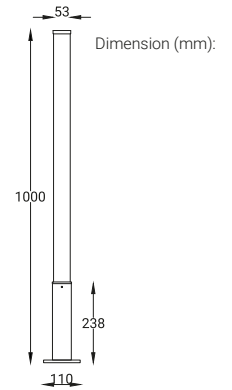


Accessories



ABK
(Anchor Bolt Kit)




MUSHO

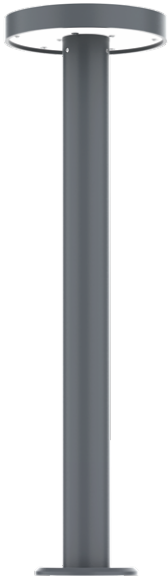

Specification

- CODE - MUSHO
- WATTAGE - 8W / 12W / 18W
- LUMEN - 770lm / 1150lm / 1710lm
- CRI - 80
- OPTICS - DF
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

Diffused

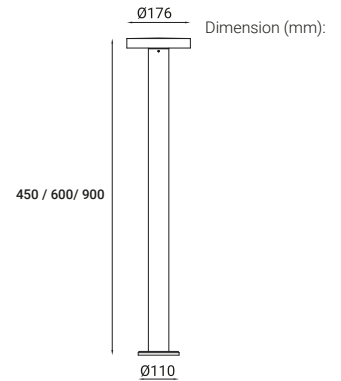

Accessories



ABK
(Anchor Bolt Kit)

*Also available in 600mm and 900mm heights.





PERSEUS



Specification

- CODE - PERSEUS
- WATTAGE - 8W/ 12W/ 18W
- LUMEN - 770lm / 1150lm / 1710lm
- CRI - 80
- OPTICS - DF
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

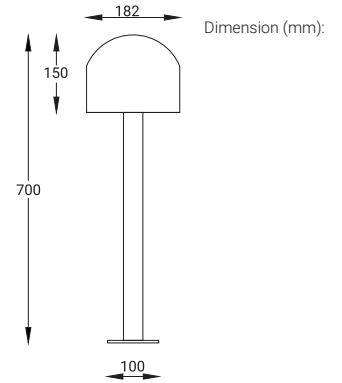


Accessories



ABK
(Anchor Bolt Kit)





PYXIS

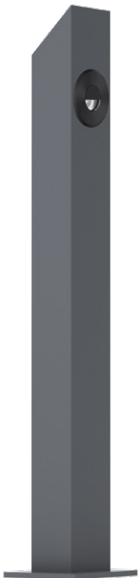

Specification

- CODE - PYXIS
- WATTAGE - 4W
- LUMEN - 400lm
- CRI - 80
- OPTICS - ASY
- CCT - 2700/ 3000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

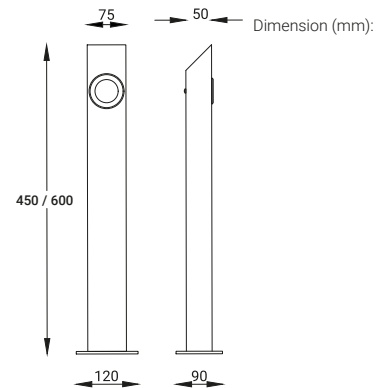


Accessories



ABK
(Anchor Bolt Kit)

*Also available in 400mm and 600mm heights.



PYXIS

PERSUS





NARROWLINE



Specification

- CODE - NARROWLINE
- WATTAGE - 6W
- LUMEN - 550lm
- CRI - 80
- OPTICS - BL
- CCT - 3000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

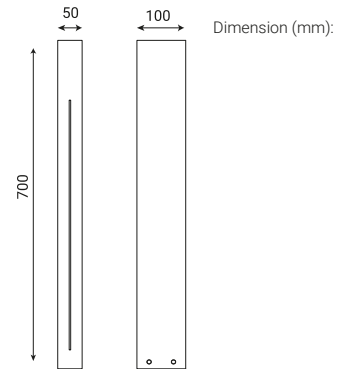

Accessories





ABK
(Anchor Bolt Kit)

MONO



Specification


- CODE - MONO
- WATTAGE - 6W
- LUMEN - 550lm
- CRI - 80
- OPTICS - M
- CCT - 3000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

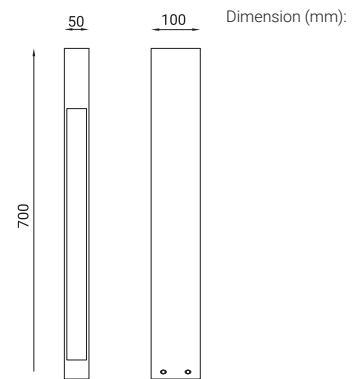

Accessories



ABK
(Anchor Bolt Kit)






YODAI



MUSHO

SETTE

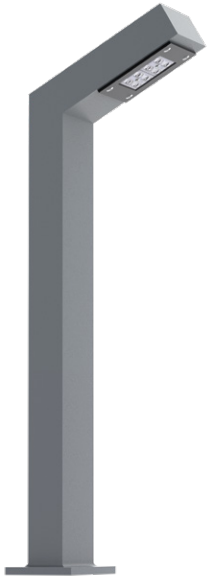

Specification

- CODE - SETTE
- WATTAGE - 8W/ 10W
- LUMEN - 770lm/ 990lm
- CRI - 80
- OPTICS - T1 70°x160°, T2 115°x155°
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

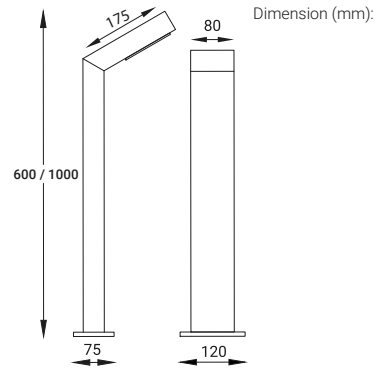


Accessories




ABK
(Anchor Bolt Kit)

*Also available in 600mm and 1000mm heights.




ANGLE

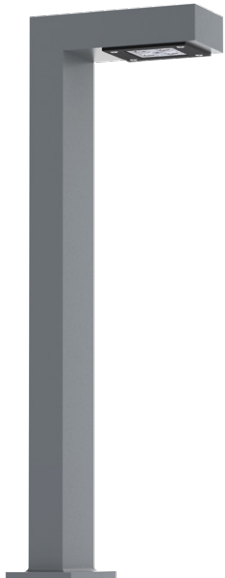

Specification

- CODE - ANGLE
- WATTAGE - 8W/ 10W
- LUMEN - 770lm/ 990lm
- CRI - 80
- OPTICS - T1 70°x160°, T2 115°x155°
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

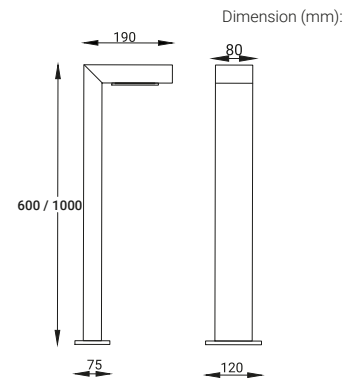


Accessories




ABK
(Anchor Bolt Kit)

*Also available in 600mm and 1000mm heights.




PERCH



Specification

- CODE - PERCH
- WATTAGE - 12W
- LUMEN - 1152lm
- CRI - 80
- OPTICS - DF
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

Dimension (mm):


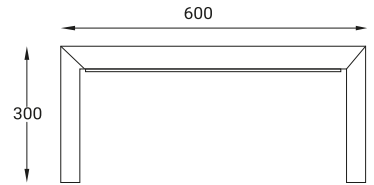


Accessories



ABK
(Anchor Bolt Kit)


ALTAR

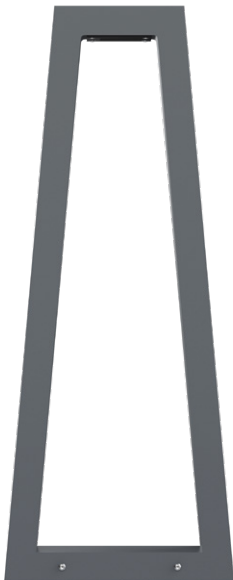

Specification

- CODE - ALTAR
- WATTAGE - 4W
- LUMEN - 400lm
- CRI - 80
- OPTICS - T2 150°x 90°
- CCT - 3000/ 4000K
- FINISH - Grey / Dark Black / Matt White / Corten / Dark Leaf Green
- SUPPLY - 230VAC
- ACCESSORIES - ABK

Dimension (mm):

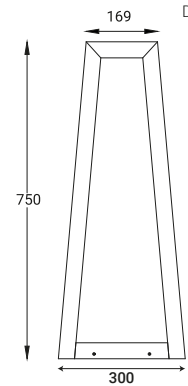

Accessories



ABK
(Anchor Bolt Kit)




PINE



Specification

CODE	-	PINE
WATTAGE	-	1.5W
LUMEN	-	90lm
CRI	-	80
OPTICS	-	DF
CCT	-	3000/ 4000K
FINISH	-	Grey / Dark Black / Matt White / Corten / Dark Leaf Green
SUPPLY	-	230VAC
ACCESSORIES	-	

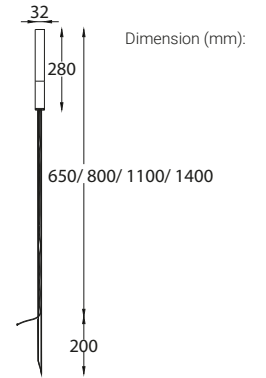

Accessories


*Also available in 650mm, 800mm, 1100mm and 1400mm heights.



LINEAR WALL WASHER

FEATURES

- Material:** Solid Aluminium Body.
Extra Safety Impact Resistant, Toughened Glass.
"Coro Safe" High Grade Anodizing.
"Duracoat" Double Layer Body Coating To WithStand Corrosion.
"Weatherprotect" Outdoor Rated Powder Coating.
- Finish:** Available In Dark Grey, Black, And White Powder-coated Colors For A Sleek And Stylish Look.
- Installation:** Easy Installation With Adjustable Clamps And Accessories, Making It Suitable For Both Diy Enthusiasts And Professionals.
- Cable:** 2x 0.75sqmm 2 Core Cable High-grade Neoprene Silicon-based Italian Cable To Withstand Any Weather Condition Includes A Generous Length Of Weatherproof Cable For Flexible Placement And Secure Electrical Connections.



Finishes



HERMIT LWW 29




Specification

CODE	-	HERMIT LWW 2928
WATTAGE	-	18W/ Mtr
LUMEN	-	1640lm
CRI	-	80
OPTICS	-	20°/ 30°/ 45° / 20°x 45°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Dark Grey/ Black/ White
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	-




Dimension (mm):

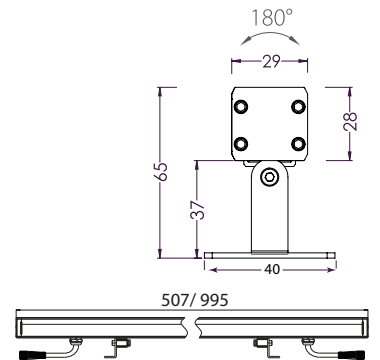


*Lumen @ 2700k.



HERMIT LWW 42




Dimension (mm):

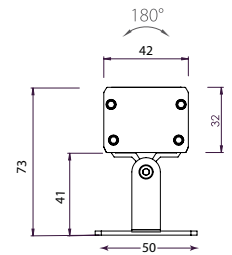

Specification

CODE	-	HERMIT LWW 4232
WATTAGE	-	18W/ 24W/ 36W
LUMEN	-	1890lm/ 2640lm/ 3960lm
CRI	-	80
OPTICS	-	8°/ 10°/ 15°/ 30°/ 45°/60° / 15°x 60°
CCT	-	2700/ 3000/ 4000K
FINISH	-	Dark Grey/ Black/ White
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	-



Accessories

*Lumen @ 2700k.



Dimension (mm):




Dimension (mm):

FEATURES

- Material:** Constructed with a sturdy stainless steel 316 marine-grade body, ensuring durability and corrosion resistance in underwater environments.
- Finish:** Designed with toughened glass that's both impact-resistant and extra clear, maximizing underwater lighting efficiency.
- Installation:** Suitable for underwater installation up to 1 meter depth, featuring a recessed housing made of ABS for secure placement.
- Cable:** Equipped with a high-grade neoprene silicon-based Italian cable, capable of withstanding the challenges of underwater conditions.





Finishes


-  Stainless Steel (SS)



AQUA 55 L



Dimension (mm):

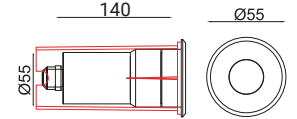

Specification

CODE	-	AQUA 55 L
WATTAGE	-	1.5W/ 2.5W/ 5W
LUMEN	-	180lm/ 300lm/ 550lm
CRI	-	80
OPTICS	-	12°/ 24°/ 40°/ 60°/ 24°x 40°/ DF
CCT	-	3000/ 4000K
FINISH	-	Stainless Steel
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	HL / RH




Accessories

*4000K Is Not Available in 5W




HL
(Hexcell Louvre)




RH
(Recessed Housing)

AQUA 41




Dimension (mm):



Specification

CODE	-	AQUA 41
WATTAGE	-	1.5W/ 2.5W/ 5W
LUMEN	-	180lm/ 300lm/ 550lm
CRI	-	80
OPTICS	-	10°/ 24°/ 40°/ 60°/ DF
CCT	-	3000/ 4000K
FINISH	-	Stainless Steel
SUPPLY	-	CV - 24VDC
ACCESSORIES	-	HL / RH



Accessories

*4000K Is Not Available in 5W



HL
(Hexcell Louvre)

The IP Code (or Ingress Protection Rating, sometimes also interpreted as International Protection Rating) consists of the letters IP followed by two digits.

First Numeral

Protection against the ingress of solid particles

IP

Second Numeral

Protection against the harmful ingress of water






































































Protection of persons against access to hazardous parts with:			Protection from water			
IP	Requirements	Example	IP	Requirement	Example	Protection from water
0	No protection		0	No protection		Non-protected
1	Full penetration of 50mm diameter sphere not allowed. Contact with hazardous parts not permitted.		1	Protected against vertically falling drops of water. Limited ingress permitted.		Vertically dripping
2	Full penetration of 12.5 mm diameter sphere not allowed. The jointed test finger shall have adequate clearance from hazardous parts.		2	Protected against vertically falling drops of water with the enclosure tilted 15° from the vertical. Limited ingress permitted.		Dripping up to 15° from the vertical
3	The access probe of 2.5 mm diameter shall not penetrate.		3	Protected against sprays to 60° from the vertical. Limited ingress permitted.		Limited spraying
4	The access probe of 1.0 mm diameter shall not penetrate.		4	Protected against water splashed from all directions. Limited ingress permitted.		Splashing from all directions
5	Limited ingress of dust permitted (no harmful deposit).		5	Protected against jets of water. Limited ingress permitted.		Hosing jets from all directions
6	Totally protected against the ingress of dust.		6	Protected against strong jets of water. Limited ingress permitted.		Strong hosing jets from all directions
			7	Protected against the effects of immersion between 15cm and 1m.		Temporary immersion
			8	Protected against long periods of immersion under pressure.		Continuous immersion

Example :

IP 6 8

Totally protected against the ingress of dust.

Protected against long periods of immersion under pressure.

	Class 1		Post Top		Blinds
	Class 2		Bollards		Blind L
	Class 3		Inground		Blind Plus
	IP 20		Step Light		Blind Y
	IP 40		Side Bend		Blind T
	IP 67		Top Bend		Narrow Spot
	IP 68		Stainless Steel		Medium
	Dimmable		Graphite Grey		Wide
	DALI Dimmable		Dark Black		Wide Flood
	Constant Current		Matt White		Diffused
	Constant Voltage		Corten		Eleptical
	Remote Driver		Dark Green Leaf		Asymmetric
	CRI 80		Silver		Up Down
	CRI 90		Silver Anodized		Patten
	Walk Over		Black		Aluminum Profiles
	Drive Over		White		Chip on Board
	Touch Safe		Copper		High Power
	Diecast		Custom Color		
	Corrosion Resistance		Hexcell Louvre		
	Ceiling Pendant		Cowl		
	Ceiling Mounted		Bracket		
	Ceiling Surface		Clamp		
	Ceiling Recessed		Anchor Bolt Kit		
	Wall Mounted		End Cap		
	Pendant		Opal		
	Adjustable		Prismatic		






Design & Technology

GET IN TOUCH



+91 97690 53357 
+91 9152008739/ 740/ 741



sales@cnclighting.in
www.cnclighting.in



Shiv Shankar Industrial Estate
No.1, Bldg No.3, Gala No.2,
Naikpada, Vasai (East)- 401208,
Dist- Palghar, Maharashtra.

