

AQUA 55 L


Features

- Stainless Steel 316 Marine Grade Body
- Extra Safety Impact Resistant, Toughened Glass
- Extra Clear Glass To Increase Efficiency of the Fixture
- High-Grade Silicon Gasket Heat and Cold Resistant
- High-Grade Brass Nickel Plated IP68 German Gland
- High-Grade Neoprene Silicon-Based Italian Cable To Withstand Any Weather Condition
- Multiple Accessories Support, Cree LED 5000* Hrs Life.
- Recessed Housing Made of ABS
- Capillary Protect System Anti Capillary System To Protect Any Water Ingress From Cable Joints.
- Long Life Thermal Management
- Automatic Cutoff at 75°
- Installation upto 1 Meter Depth



Technical Data

Application Category	Underwater
Wattage	1.5W/ 2.5W/5W
Source Lumen	180lm/ 300lm/ 550lm
Ingress Protection	IP68
Material	Stainless Steel 316 Marine Grade Body
Coatings	-
Light Source	High Power Led
Life Span	50000 hrs*
Screws	Stainless Steel
Power Supply	CV - 24V DC
Gasket	-
Glass	High Transmission Tempered Glass
Cable Gland	-
Power Cable	Cable Not Included
Dimension	Dia : 55mm, Height : 140mm
Gross Weight	-

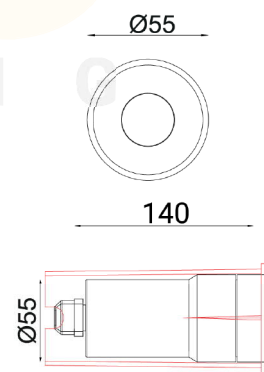


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
AQUA	RECESSED	55 L	1.5W (180lm) 2.5W (300lm) 5W (550lm)	80 – 80 CRI	N – 12° M – 24° W – 40° WF – 60° EL- 24 x 40° DF – Diffused	30 – 3000K 40 – 4000K	SS – Stainless Steel 316	CV – 24V DC	HL RH

Code Example :- AQUA-RECESSED-55L-1.5-80-N-30-SS-CV- HL




AQUA 55 L

Accessories




RH
(Recessed Housing)
Provided with the fixture for installation.



HL
(Hexcell Louvre)
Optional accessory that integrates to reduce glare.

Driver Options



Brand - Meanwell
Code - LPV-20-24
Type - Constant Voltage 24V DC
Watt - 20W
IP Rating - IP67
No Of Fixtures - Min 1, Max 3


Optional Accessories



IP Connectors
Straing Connector
Code - LPV-20-24
IP Rating - IP68



IP Connectors
T Connector
Code - LPV-20-24
IP Rating - IP68



IP Connectors
4 Way Connector
Code - LPV-20-24
IP Rating - IP68

Finish



Stainless Steel