

BOXY WM 39 UD


Features

- Solid Aluminium Body.
- Extra Safety Impact Resistant, Toughened Glass.
- High-Efficiency Optical System
- Extra Clear Glass To Increase Efficiency Of The Fixture
- High-Grade Silicon Gasket- Heat & Cold Resistant.
- “Coro Safe” High-Grade Anodizing
- “Duracoat” Double Layer Body Coating To WithStand Corrosion
- “Weatherprotect” Outdoor Rated Powder Coating
- “Long Life” Thermal Management.



Technical Data

Application Category	Wall Mount
Wattage	5W(2.5W + 2.5W)
Source Lumen	600lm (300lm + 300lm)
Ingress Protection	IP65
Material	Aluminium Extrusion And Solid Aluminium Parts
Coatings	"Weather Protect"High Grade Pure Polyester Outdoor Powder Coating
Light Source	High Power Led
Life Span	50000 hrs*
Screws	Stainless Steel
Power Supply	230V AC
Gasket	High Grade Long Lasting Silicon Gasket.
Glass	High Grade PMMA Clear Diffuser.
Cable Gland	-
Power Cable	Cable Not Included
Dimension	Width : 39mm, Height :117mm
Gross Weight	-

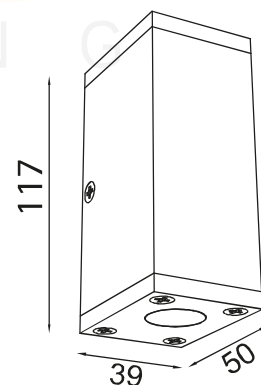

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CC	FINISH	SUPPLY	ACCESSORIES
BOXY	WM	39-UD	5 - 5W (2.5 + 2.5W) 600lm (300lm+300lm)	80 – 80 CRI	N – 12° M – 24° W – 40° WF – 60°	27 – 2700K 30 – 3000K 40 – 4000K	G – Grey DB – Dark Black MW – Matt White C – Corten DLG – Dark leaf Green	230 - 230V AC	HL

Code Example :- BOXY-WM-39-UD-5-80-M-30-G-230-HL




BOXY WM 39 UD

Accessories




HL
(Hexcell Louvre)
Optional accessory that
integrates to reduce glare.


Optional Accessories



IP Connectors
Straight Connector
IP Rating - IP68




IP Connectors
T Connector
IP Rating - IP68



IP Connectors
4 Way Connector
IP Rating - IP68

cnc
LIGHTING
BY
RKLITE
SINCE 1961


Finish



Grey



Dark Black



Dark Leaf
Green




Matt White



Corten



Matt Black



Brown