

# BULLET WM 61UD D3


## Features

- Solid Aluminium Body.
- Extra Safety Impact Resistant, Toughened Glass.
- High-Efficiency Optical System
- Extra Clear Glass To Increase Efficiency Of The Fixture
- High-Grade Silicon Gasket- Heat & Cold Resistant.
- "Coro Safe" High-Grade Anodizing
- "Duracoat" Double Layer Body Coating To WithStand Corrosion
- "Weatherprotect" Outdoor Rated Powder Coating
- "Long Life" Thermal Management.



## Technical Data

|                      |                                                                   |
|----------------------|-------------------------------------------------------------------|
| Application Category | Wall Mount                                                        |
| Wattage              | 14W(7W+7W)                                                        |
| Source Lumen         | 1230lm(630lm + 630lm)                                             |
| Ingress Protection   | IP65                                                              |
| Material             | Aluminium Extrusion And Solid Aluminium Parts                     |
| Coatings             | "Weather Protect"High Grade Pure Polyester Outdoor Powder Coating |
| Light Source         | High Power Led                                                    |
| Life Span            | 50000 hrs*                                                        |
| Screws               | Stainless Steel                                                   |
| Power Supply         | 230V AC                                                           |
| Gasket               | High Grade Long Lasting Silicon Gasket.                           |
| Glass                | High Grade PMMA Clear Diffuser.                                   |
| Cable Gland          | -                                                                 |
| Power Cable          | Cable Not Included                                                |
| Dimension            | Height :230mm, Dia:61mm                                           |
| Gross Weight         | -                                                                 |

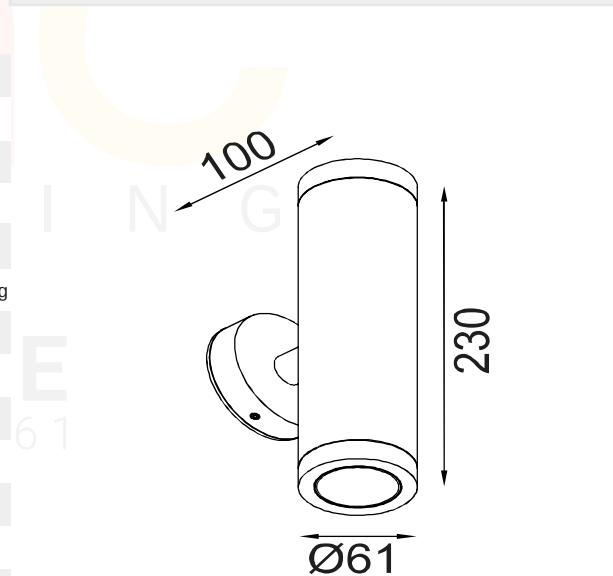

| FAMILY | TYPE | CODE    | WATTAGE (LUMEN)                         | CRI         | OPTICS                          | CC                                     | FINISH                                                                                | SUPPLY        | ACCESSORIES |
|--------|------|---------|-----------------------------------------|-------------|---------------------------------|----------------------------------------|---------------------------------------------------------------------------------------|---------------|-------------|
| BULLET | WM   | 61UD-D3 | 14W(7W+7W)<br>1230lm<br>(630lm + 630lm) | 80 – 80 CRI | N – 12°<br>SP – 18°<br>WF – 54° | 27 – 2700K<br>30 – 3000K<br>40 – 4000K | G – Grey<br>DB – Dark Black<br>MW – Matt White<br>C – Corten<br>DLG – Dark leaf Green | 230 - 230V AC | HL          |

Code Example :- BULLET-WM-61UD-D3-14-80-SP-30-G-230-HL



# BULLET WM 61UD D3

## Accessories




HL  
( Hexcell Louvre)  
Optional accessory that  
integrates to reduce glare.


## Optional Accessories



IP Connectors  
Straight Connector  
IP Rating - IP68




IP Connectors  
T Connector  
IP Rating - IP68



IP Connectors  
4 Way Connector  
IP Rating - IP68

cnc  
LIGHTING  
BY  
RKLITE  
SINCE 1961

## Finish



Grey



Dark Black



Dark Leaf  
Green




Matt White



Corten



Matt Black



Brown