

PILLAR


Features

- Bollards Designs That Blends With The Modern City Landscapes To Provide A More Homogeneous And Distinguished Look
- Designs That Affects The Lighting Output, And There Are Other Parameters Like Mounting Height, Spacing, Outreach
- High-Efficiency Led Technology Provides Maximum Flexibility For Applications Such As Gardens, Landscape, Pathways or Walkways.
- Corrosion Resistant Double Layer Polyester Powder Coated Paint Finish Die Cast/ Extruded Aluminium Housing/Gi Pipes
- Stainless Steel Screws And Silicone Gaskets. The power Unit Is Built In
- Thermal-Shock Resistant Tempered Glass. .
- Operating Temperature: -20°C ~ +55°C
- Outstanding Light Efficiency And Integrates Itself Through The Reduced Design Into Historic And Modern Surroundings.
- Both Its Appearance And The Materials Used In Its Manufacture Are Intended To Last.



Technical Data

Application Category	Bollard						
Wattage	12W						
Source Lumen	1150lm						
Ingress Protection	IP65						
Material	Aluminium Extrusion And Solid Aluminiium Parts						
Coatings	"Weather Protect" High Grade Pure Polyester Outdoor Powder Coating						
Light Source	High Power Led						
Life Span	50000 hrs*						
Screws	Stainless Steel						
Power Supply	230V AC						
Gasket	High Grade Long Lasting Silicon Gasket.						
Glass	Slass High Grade PMMA Diffuser.						
Cable Gland	and -						
Power Cable	Cable Not Included						
Dimension	ension Dia - 110mm, Height - 1000mm						
Gross Weight	-						



DLG - Dark leaf Green

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	СС	FINISH	SUPPLY	ACCESSORIES
PILLAR	ВО	100 - 1000	12 – 12W (1150lm)	80 – 80 CRI	DF — Diffused	30 – 3000K 40 – 4000K	G – Grey DB – Dark Black MW – Matt White C – Corten	230 - 230V AC	ABK

Code Example :- PILLAR-BO-100-12-80-DF-30-G-230-ABK



sales@cnclighting.in www.cnclighting.in




PILLAR

Accessories



ABK
(Anchor Bolt Kit)
Provided with the fixture for installation.

Optional Accessories

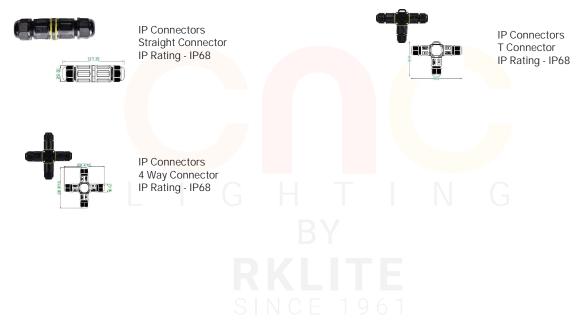

Finish



sales@cnclighting.in www.cnclighting.in