

TERRA SL 140 ASY


Features

- Excellent Corrosion Resistant Low Copper Solid Aluminum Body
- SS316 Faceplate
- Extra Safety Impact Resistant, Toughened Glass
- Extra Clear Glass To Increase Efficiency of the Fixture
- High-Grade Silicon Gasket Heat and Cold Resistant
- High-Grade Brass Nickel Plated IP68 German Gland
- High-Efficiency Optical System
- Multiple Accessories Support
- Cree LED 50000* Hrs Life
- Recessed Housing Made of GFR Polymer
- Coro Safe High-Grade Anodizing
- Capillary Protect System Anti Capillary System To Protect Any Water Ingress From Cable Joints.
- Long Life Thermal Management



Technical Data

Application Category	Steplight
Wattage	6W/8W
Source Lumen	540lm/720lm
Ingress Protection	IP67
Material	Excellent Corrosion Resistance Low Copper, Solid Aluminium Body.
Coatings	Coro Safe High-Grade Anodizing.
Light Source	4 x High Power Led
Life Span	50000 hrs*
Screws	Stainless Steel
Power Supply	CC - Constant Current Driver (12V, 500mA/ 700mA)/ CV- 24V DC
Gasket	High-Grade Silicon Gasket Heat and Cold Resistant
Glass	High Transmission Tempered Glass
Cable Gland	German Gland
Power Cable	Cable Not Included
Dimension	Width : 140mm, Height : 100mm, Dia : 123 mm
Gross Weight	-

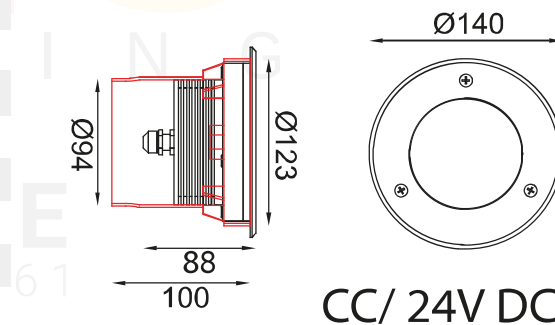


FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
TERRA	SL	140-ASY	6 – 6W (540lm) 8 – 8W (720lm)	80 – 80 CRI	ASY – Asymmetric EL – 20 x 40°	27 – 2700K 30 – 3000K 40 – 4000K	SS – Stainless Steel 316	CC – Constant Current Driver (12V, 500mA/700mA) CV - 24V DC	RH

Code Example :- TERRA-SL-140-ASY-6-80-ASY-30-SS-CC-RH



TERRA SL 140 ASY

Accessories



RH
(Recessed Housing)
Provided with the fixture for
installation.

Driver Options



Brand- Meanwell
Code- APC-25-500
Type - Constant Current CC
Watt - 25W
IP Rating - IP54
No Of Fixtures - Min 2, Max 4
Dimension-84*57*29.5(L*W*H)



Brand- Meanwell
Code- LPHC-18-700
Type - Constant Current CC
Watt - 18W
IP Rating - IP67
No Of Fixtures - Min 1, Max 1
Dimension-140*30*22(L*W*H)



Brand- Meanwell
Code- LPV-20-24
Type - Constant Voltage 24V DC
Watt - 20W
IP Rating - IP67
No Of Fixtures - Min 1, Max 3
Dimension-118*35*26mm (L*W*H)


Optional Accessories



IP Connectors
Straight Connector
IP Rating - IP68



IP Connectors
T Connector
IP Rating - IP68



IP Connectors
4 Way Connector
IP Rating - IP68

Finish



Stainless Steel