

NOVA SP 50 COB


Features

- Solid Aluminium Body.
- Extra Safety Impact Resistant, Toughened Glass.
- High-Efficiency Optical System
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- High Grade Silicon Gasket- Heat & Cold Resistant.
- High Grade Brass Nickel Plated German Gland.
- High Grade Neoprene Silicon Based Italian Cable To Withstand Any Weather Conditions.
- Recessed Spike Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Duracoat" Double Layer Body Coating To With Stand Corrosion.
- "Weather protect" Outdoor Rated Powder Coating.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- 1000mm All Weather Neoprene Silicon Power Cable Included



Technical Data

Application Category	Projectors
Wattage	8W
Source Lumen	800lm
Ingress Protection	IP66
Material	Aluminium Extrusion And Solid Aluminium Parts
Coatings	"Duracoat" Double Layer Body Coating To WithStand Corrosion.
Light Source	1 x High Power Led
Life Span	50000 hrs*
Screws	Stainless Steel
Power Supply	CV - 24V DC
Gasket	High-Grade Silicon Gasket Heat and Cold Resistant
Glass	High Transmission Tempered Glass
Cable Gland	German Gland
Power Cable	Cable Not Included
Dimension	Width : 121mm, Height : 52mm, Dia : 50mm
Gross Weight	-

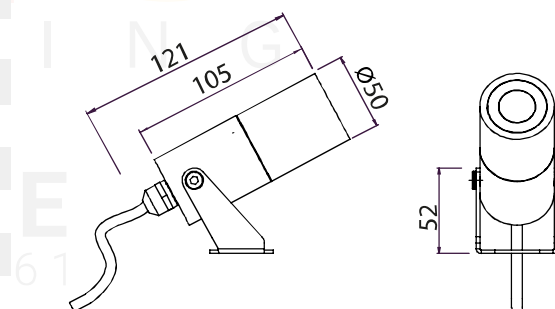

24V DC

FAMILY	TYPE	CODE	WATTAGE (LUMEN)	CRI	OPTICS	CCT	FINISH	SUPPLY	ACCESSORIES
NOVA	SP	50-COB	8 – 8W (800lm)	80 – 80 CRI	SP – 19° M – 24° W – 36°	27 – 2700K 30 – 3000K 40 – 4000K	G – Grey DB – Dark Black MW – Matt White C – Corten DLG – Dark leaf Green	CV – 24V DC	HL TB SP

Code Example :- NOVA-SP-50-COB-8-80-M-30-G-CV- HL



NOVA SP 50 COB

Accessories



HL
(Hexcell Louvre)
Optional accessory that
integrates to reduce glare.



TB
(Tree Belt)
Optional accessory



SP
(Spike)
Optional accessory

Driver Options



Brand - Meanwell
Code - LPV-20-24
Type - Constant Voltage
Watt - 20W
IP Rating - IP67
No Of Fixtures - Min 1, Max 2
Dimension:118*35*26mm (L*W*H)



Brand - Meanwell
Code - LPV-60-24
Type - Constant Voltage
Watt - 60W
IP Rating - IP67
No Of Fixtures - Min 1, Max 7
Dimension:162.5*42.5*32mm (L*W*H)


Optional Accessories



IP Connectors
Straing Connector
IP Rating - IP68




IP Connectors
T Connectort
IP Rating - IP68



IP Connectors
4 Way Connector
IP Rating - IP68


Finish



Grey



Dark Black



Dark Leaf
Green




Matt White



Corten



Matt Black



Brown